


Asber glasswashers come in two different ranges: Easy Wash for uncomplicated electromechanical operation and Tech Wash for those who prefer high precision with electronic controls.

Both ranges offer excellent washing results and maximum resistance to wear, due to the high quality of the materials employed. In addition, all main glasswasher components are located to be easily accessed during maintenance operations.


Asber Tech Wash has been designed to provide advance features and maximum productivity. Asber Tech Wash glasswashers allows washing glasses up to 220 mm HIGH (350 x 350 mm basket models) or 270 high (400 x 400 mm basket models). They ensure excellent washing and rinsing results, combined with outstanding hygiene, keeping a high level of productivity.



THEY HAVE A FULLY ELECTRONIC CONTROL PANEL AND A SAFETY ELECTROMAGNETIC MICRO-SWITCH WHEN DOOR IS OPENED.

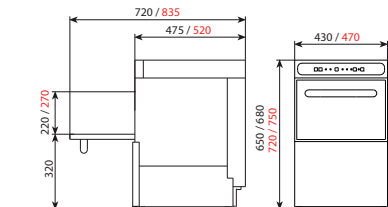

WaterMark Certificate

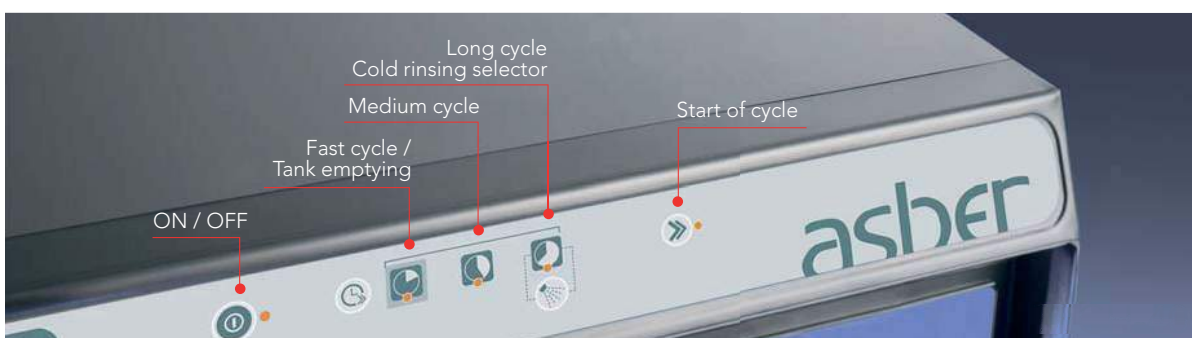



Intuitive and easy-to-use.



Low water consumption: 2-2.5 liters.



Double thermoplastic washing and rinsing arms.



Independent cycle for cold rinsing in 400 x 400 mm models. Complete filtering system to keep clean water longer.



Compact design, with double-wall door, increases security and soundproofing.



Built-in automatic rinse aid and optional detergent dispensers.



Structure fully made of stainless steel.




Safety thermostat and anti-backflow valve.

Asber Easy Wash glasswashers allow washing glasses up to 220 mm HIGH (350 x 350 mm basket models) or 270 high (400 x 400 mm basket models). Asber glasswashers ensure excellent washing and rinsing results, combined with outstanding hygiene, keeping a high level of productivity. All models have a safety electromagnetic micro-switch when door is opened.




THEY HAVE AN ELECTROMECHANICAL CONTROL PANEL, VERY INTUITIVE AND EASY-TO-MAINTAIN.

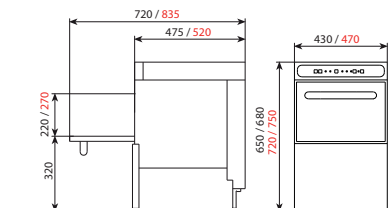



TECH-350

- Electronic control panel.
- 3 washing cycles:
 - 90" / 120" / 180"
- Tank capacity: 11 l. / Heating power: 2.0 kw.
- Booster capacity: 5 l. / Heating power: 2.4 kw.
- Wash pump power: 0.25 kw.
- Rinsing consumption: 2 l/rinse.
- Built-in rinse aid dispenser.
- Anti backflow valve fitted.
- Temperatures adjusted:
 - Wash 60 °C and rinse 90 °C.
- Safety thermostat and thermostop device.
- Accessories supplied: 2 baskets of 350 x 350 mm and 1 basket for cutlery CU.

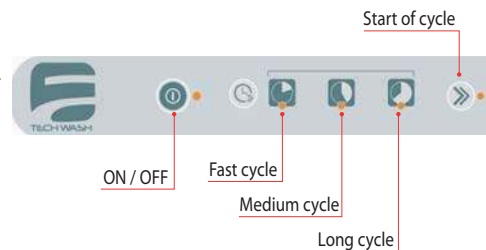


Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Cold rinsing	Power (kW)	Voltage (V)
TECH-350	19013461	40	190	430 x 475 x 650	Not	2,65	230V-50/60Hz



TECH-350 DD – WITH DETERGENT DISPENSER

- Electronic control panel.
- 3 washing cycles:
 - 90" / 120" / 180"
- Tank capacity: 11 l. / Heating power: 2.0 kw.
- Booster capacity: 5 l. / Heating power: 2.4 kw.
- Wash pump power: 0.25 kw.
- Rinsing consumption: 2 l/rinse.
- Built-in rinse aid dispenser and detergent dispenser.
- Anti backflow valve fitted.
- Temperatures adjusted:
 - Wash 60 °C and rinse 90 °C.
- Safety thermostat and thermostop device.
- Accessories supplied: 2 baskets of 350 x 350 mm and 1 basket for cutlery CU.

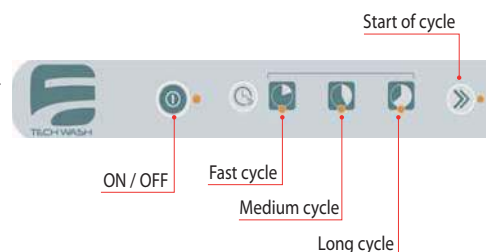

Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Cold rinsing	Power (kW)	Voltage (V)
TECH-350 DD	19013462	40	190	430 x 475 x 650	Not	2,65	230V-50/60Hz

ADDITIONAL MODELS

Model	Reference	Voltage (V)	Washing cycles (seconds)	Power (kW)	Features
TECH-350 UK	19013463	230V-50Hz	90/120/180	2,65	With detergent dispenser / not cold rinsing



PL-43
PL-47



PL-47-L



CLV-35
CLV-40



CU



CU-7



SP-35
SP-40


ACCESSORIES

Model	Reference	Description	For use in	Dimensions (mm)
PL-43	19003461	Supplementary base	All models TECH-350 and EASY-350	430 x 405 x 400
PL-47	19003462	Supplementary base	All models TECH-400 and EASY-400	470 x 450 x 400
PL-47-L	19014796	Base for glasswashers	All models TECH-350 and TECH-400	470 x 520 x 131
CLV-35	19013867	Basket for glasswasher	All models TECH-350 and EASY-350	350 x 350 x 110
CLV-40	19013868	Basket for glasswasher	All models TECH-400 and EASY-400	400 x 400 x 140
CU-7	19000792	Cutlery basket	All baskets	105 x 105 x 130
CU	19020300	Cutlery basket	All baskets	Ø110 x 125
SP-35	19017111	Support for dishes	Basket of 350 x 350 mm	-
SP-40	19017112	Support for 11 dishes	Support for dishes	-



TECH-400

- Electronic control panel.
- 3 washing cycles:
 - 90" / 120" / 180"
- Tank capacity: 15 l. / Heating power: 2.0 kw.
- Booster capacity: 5 l. / Heating power: 2.8 kw.
- Wash pump power: 0.25 kw.
- Rinsing consumption: 2.5 l/rinse.
- Built-in rinse aid dispenser.
- Anti backflow valve fitted.
- Temperatures adjusted:
 - Wash 60 °C and rinse 90 °C
- Safety thermostat and thermostop device.
- Accessories supplied: 2 baskets of 400 x 400 mm, 1 dish bracket and 1 basket for cutlery CU.

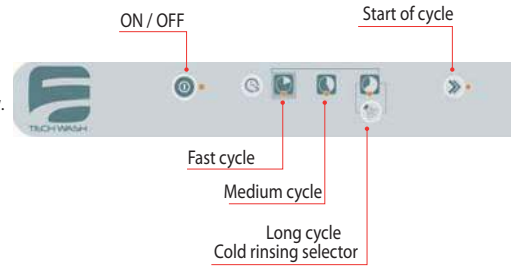


Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Cold rinsing	Power (kW)	Voltage (V)
TECH-400	19013464	40	270	470 x 520 x 720	Yes	3,05	230V-50/60Hz



TECH-400 B - WITH DRAIN PUMP

- Electronic control panel.
- 3 washing cycles:
 - 90" / 120" / 180"
- Tank capacity: 15 l. / Heating power: 2.0 kw.
- Booster capacity: 5 l. / Heating power: 2.8 kw.
- Wash pump power: 0.25 kw.
- Rinsing consumption: 2.5 l/rinse.
- Built-in rinse aid dispenser and drain pump.
- Anti backflow valve fitted.
- Temperatures adjusted:
 - Wash 60 °C and rinse 90 °C.
- Safety thermostat and thermostop device.
- Accessories supplied: 2 baskets of 400 x 400 mm, 1 dish bracket and 1 basket for cutlery CU.

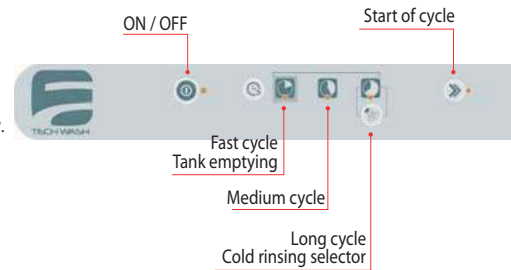


Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Cold rinsing	Power (kW)	Voltage (V)
TECH-400 B	19013466	40	270	470 x 520 x 720	Yes	3,05	230V-50Hz



TECH-400 DD - WITH DETERGENT DISPENSER

- Electronic control panel.
- 3 washing cycles:
 - 90" / 120" / 180"
- Tank capacity: 15 l. / Heating power: 2.0 kw.
- Booster capacity: 5 l. / Heating power: 2.8 kw.
- Wash pump power: 0.25 kw.
- Rinsing consumption: 2.5 l/rinse.
- Built-in rinse aid dispenser and detergent dispenser.
- Anti backflow valve fitted.
- Temperatures adjusted:
 - Wash 60 °C and rinse 90 °C.
- Safety thermostat and thermostop device.
- Accessories supplied: 2 baskets of 400 x 400 mm, 1 dish bracket and 1 basket for cutlery CU.

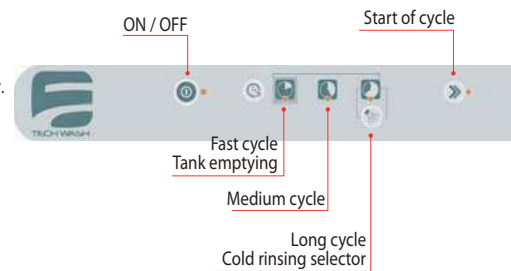

Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Cold rinsing	Power (kW)	Voltage (V)
TECH-400 DD	19013465	40	270	470 x 520 x 720	Yes	3,05	230V-50/60Hz


ADDITIONAL MODELS

Model	Reference	Voltage (V)	Washing cycles (seconds)	Power (kW)	Features
TECH-400 B DD	19020481	230V-50/60Hz	90/120/180	3,05	With drain pump / cold rinsing / detergent dispenser
TECH-400 B	19013469	230V-60Hz	90/120/180	3,05	With drain pump / cold rinsing
TECH-400 UK	19013467	230V-50Hz	90/120/180	2,65	With detergent dispenser / cold rinsing
TECH-400 UK B	19013468	230V-50Hz	90/120/180	2,65	With detergent dispenser / drain pump / cold rinsing



EASY-350

- Electromechanical control panel.
- 1 washing cycle of 120".
- Tank capacity: 11 l. / Heating power: 2.0 kw.
- Booster capacity: 5 l. / Heating power: 2.4 kw.
- Wash pump power: 0.25 kw.
- Rinsing consumption: 2 l/rinse.
- Built-in rinse aid dispenser.
- Anti backflow valve fitted.
- Temperatures adjusted:
 - Wash 60 °C and rinse 90 °C.
- Accessories supplied: 2 baskets of 350 x 350 mm and 1 basket for cutlery CU.

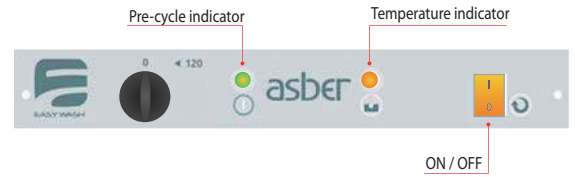


Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Cold rinsing	Power (kW)	Voltage (V)
EASY-350	19013452	30	190	430 x 475 x 650	Not	2,65	230V-50Hz



EASY-350 DD – WITH DETERGENT DISPENSER

- Electromechanical control panel.
- 1 washing cycle of 120".
- Tank capacity: 11 l. / Heating power: 2.0 kw.
- Booster capacity: 5 l. / Heating power: 2.4 kw.
- Wash pump power: 0.25 kw.
- Rinsing consumption: 2 l/rinse.
- Built-in rinse aid dispenser and detergent dispenser.
- Anti backflow valve fitted.
- Temperatures adjusted:
 - Wash 60 °C and rinse 90 °C.
- Accessories supplied: 2 baskets of 350 x 350 mm and 1 basket for cutlery CU.

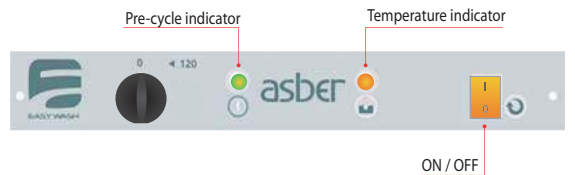

Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Cold rinsing	Power (kW)	Voltage (V)
EASY-350 DD	19013453	30	190	430 x 475 x 650	Not	2,65	230V-50Hz

ADDITIONAL MODELS

Model	Reference	Voltage (V)	Washing cycles (seconds)	Power (kW)	Features
EASY-350	19013551	230V-60Hz	120	2,65	Not cold rinsing
EASY-350 DD	19013552	230V-60Hz	120	2,65	With detergent dispenser / not cold rinsing
EASY-350 UK	19013454	230V-50Hz	120	2,65	With detergent dispenser / not cold rinsing



PL-43
PL-47



PL-47-L



CLV-35
CLV-40



CU



CU-7



SP-35
SP-40


ACCESSORIES

Model	Reference	Description	For use in	Dimensions (mm)
PL-43	19003461	Supplementary base	All models TECH-350 and EASY-350	430 x 405 x 400
PL-47	19003462	Supplementary base	All models TECH-400 and EASY-400	470 x 450 x 400
PL-47-L	19014796	Base for glasswashers	All models TECH-350 and TECH-400	470 x 520 x 131
CLV-35	19013867	Basket for glasswasher	All models TECH-350 and EASY-350	350 x 350 x 110
CLV-40	19013868	Basket for glasswasher	All models TECH-400 and EASY-400	400 x 400 x 140
CU-7	19000792	Cutlery basket	All baskets	105 x 105 x 130
CU	19020300	Cutlery basket	All baskets	Ø110 x 125
SP-35	19017111	Support for dishes	Basket of 350 x 350 mm	-
SP-40	19017112	Support for dishes	Basket of 400 x 400 mm	-



EASY-400

- Electromechanical control panel.
- 1 washing cycle of 120".
- Tank capacity: 15 l. / Heating power: 2.0 kw.
- Booster capacity: 5 l. / Heating power: 2.8 kw.
- Wash pump power: 0.25 kw.
- Rinsing consumption: 2.8 l/rinse.
- Built-in rinse aid dispenser.
- Anti backflow valve fitted.
- Safety thermostat.
- Temperatures adjusted:
 - Wash 60 °C and rinse 90 °C.
- Accessories supplied: 2 baskets of 400 x 400 mm, 1 dish bracket and 1 basket for cutlery CU.

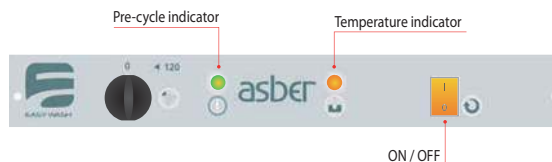


Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Cold rinsing	Power (kW)	Voltage (V)
EASY-400	19013455	30	270	470 x 520 x 720	Yes	3,05	230V-50Hz



EASY-400 B - WITH DRAIN PUMP

- Electromechanical control panel.
- 1 washing cycle of 120".
- Tank capacity: 15 l. / Heating power: 2.0 kw.
- Booster capacity: 5 l. / Heating power: 2.8 kw.
- Wash pump power: 0.25 kw.
- Rinsing consumption: 2.8 l/rinse.
- Built-in rinse aid dispenser.
- Anti backflow valve fitted and drain pump.
- Safety thermostat.
- Temperatures adjusted:
 - Wash 60 °C and rinse 90 °C.
- Accessories supplied: 2 baskets of 400 x 400 mm, 1 dish bracket and 1 basket for cutlery CU.

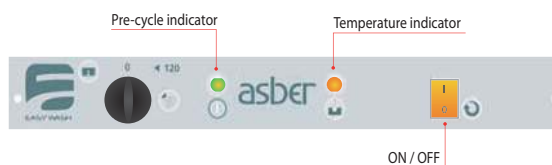


Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Cold rinsing	Power (kW)	Voltage (V)
EASY-400 B	19013457	30	270	470 x 520 x 720	Yes	3,05	230V-50Hz



EASY-400 DD – WITH DETERGENT DISPENSER

- Electromechanical control panel.
- 1 washing cycle of 120".
- Tank capacity: 15 l. / Heating power: 2.0 kw.
- Booster capacity: 5 l. / Heating power: 2.8 kw.
- Wash pump power: 0.25 kw.
- Rinsing consumption: 2.8 l/rinse.
- Built-in rinse aid dispenser.
- Anti backflow valve fitted and detergent dispenser.
- Safety thermostat.
- Temperatures adjusted:
 - Wash 60 °C and rinse 90 °C.
- Accessories supplied: 2 baskets of 400 x 400 mm, 1 dish bracket and 1 basket for cutlery CU.

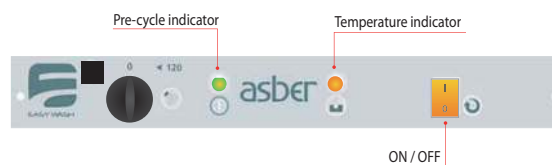

Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Cold rinsing	Power (kW)	Voltage (V)
EASY-400 DD	19013456	30	270	470 x 520 x 720	Yes	3,05	230V-50Hz

ADDITIONAL MODELS

Model	Reference	Voltage (V)	Washing cycles (seconds)	Power (kW)	Features
EASY-400	19013554	230V-60Hz	120	3,05	With cold rinsing
EASY-400 B	19013460	230V-60Hz	120	3,05	With drain pump / cold rinsing
EASY-400 DD	19013555	230V-60Hz	120	3,05	With detergent dispenser / cold rinsing
EASY-400 B DD	19020480	230V-50Hz	120	3,05	With drain pump / cold rinsing / detergent dispenser
EASY-400 UK	19013458	230V-50Hz	120	2,65	With detergent dispenser / cold rinsing
EASY-400 UK B	19013459	230V-50Hz	120	2,65	With detergent dispenser / drain pump / cold rinsing