


**Asber front-opening dishwashers come in two different ranges:** Easy Wash for uncomplicated electromechanical operation and Tech Wash for those who prefer high precision with electronic controls.

Both ranges offer excellent washing results and maximum resistance to wear, due to the high quality of the materials employed. In addition, all main dishwasher components are located to be easily accessed during maintenance operations.

Asber Tech Wash has been designed to provide advance features and maximum productivity. Asber Tech Wash front-opening models allows washing all kinds of ware up to 320 mm high. They ensure excellent washing and rinsing results, combined with outstanding hygiene, keeping a high level of productivity.

**THEY HAVE A FULLY ELECTRONIC CONTROL PANEL AND A SAFETY ELECTROMAGNETIC MICRO-SWITCH WHEN DOOR IS OPENED.**

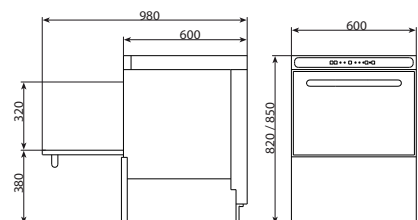

## TECH | Main Features

Production from 540 to 720 pieces/hour, depending on the model.

Fully electronic control panel with membrane keypad. Displays and controls washing status at any time.

Thermo-stop system guaranteeing minimum rinsing temperature of 85°C, enough to remove any germs.

3 washing cycles of 90, 120 and 180 seconds, in standard models. 3 washing cycles of 60, 90 and 180 seconds in high-powered models.

Users could select the washing cycle depending on the type of ware and amount of dirt.

High quality, stainless steel structure guarantees a reliable, robust and durable range with an extended lifetime.

Tank with internal rounded edges to make cleaning operations easier, avoiding grease and dirt built-up, ensuring maximum hygiene.



Intuitive and easy-to-use.



Low water consumption: 2-2.5 liters.



Double thermoplastic washing and rinsing arms.



Independent cycle for cold rinsing in 400 x 400 mm models. Complete filtering system to keep clean water longer.



Compact design, with double-wall door, increases security and soundproofing.



Built-in automatic rinse aid and optional detergent dispensers.



Structure fully made of stainless steel.



Safety thermostat and anti-backflow valve.

Asber Easy Wash front-opening dishwashers allow washing all kinds of dishware up to 320 mm high. Asber front-opening models ensure excellent washing and rinsing results, combined with outstanding hygiene, keeping a high level of productivity. They have an electromechanical control panel, very intuitive and easy-to-maintain. All models have a safety electromagnetic micro-switch when door is opened.



## EASY | Main Features

Production from 540 to 720 pieces/hour, depending on the model.

Electromechanical control panel with pilot lights, very easy-to-use.


1 washing cycles of 120 seconds, in standard models. 2 washing cycles of 90 and 180 seconds in high-powered models. Users could select the washing cycle depending on the type of ware and amount of dirt.

High quality, stainless steel structure guarantees a reliable, robust and durable range with an extended lifetime.

Tank with internal rounded edges to make cleaning operations easier, avoiding grease and dirt built-up, ensuring maximum hygiene.




WaterMark Certificate

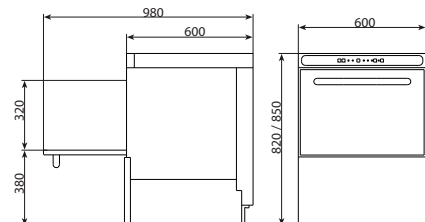



**TECH-500**

- Electronic control panel.
- 3 washing cycles:
  - 90" / 120" / 180"
- Tank capacity: 25 l. / Heating power: 2.8 kw.
- Booster capacity: 7 l. / Heating power: 2.8 kw.
- Wash pump power: 0.6 kw.
- Rinsing consumption: 2.7 l/rinse.
- Built-in rinse aid dispenser.
- Anti backflow valve fitted.
- Safety thermostat and thermostop device.
- Temperatures adjusted: Wash 60 °C and rinse 90 °C.
- Accessories supplied: 1 basket CP-16/18, 1 basket CT-10 and 4 baskets for cutlery CU-7.

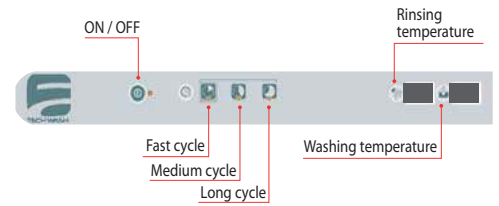


Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Power (kW)	Voltage (V)
TECH-500	19013494	40	320	600 x 600 x 820	3,4	230V-50Hz



**TECH-500 B – WITH DRAIN PUMP**

- Electronic control panel.
- 3 washing cycles:
  - 90" / 120" / 180"
- Tank capacity: 25 l. / Heating power: 2.8 kw.
- Booster capacity: 7 l. / Heating power: 2.8 kw.
- Wash pump power: 0.6 kw.
- Rinsing consumption: 2.7 l/rinse.
- Built-in rinse aid dispenser and drain pump.
- Anti backflow valve fitted.
- Safety thermostat and thermostop device.
- Temperatures adjusted: Wash 60 °C and rinse 90 °C.
- Accessories supplied: 1 basket CP-16/18, 1 basket CT-10 and 4 baskets for cutlery CU-7.

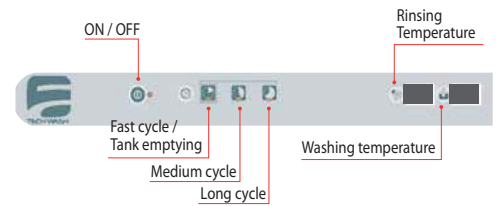


Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Power (kW)	Voltage (V)
TECH-500 B	19013496	40	320	600 x 600 x 820	3,4	230V-50Hz



**TECH-500 DD – WITH DETERGENT DISPENSER**

- Electronic control panel.
- 3 washing cycles:
  - 90" / 120" / 180"
- Tank capacity: 25 l. / Heating power: 2.8 kw.
- Booster capacity: 7 l. / Heating power: 2.8 kw.
- Wash pump power: 0.6 kw.
- Rinsing consumption: 2.7 l/rinse.
- Built-in rinse aid dispenser and detergent dispenser.
- Anti backflow valve fitted.
- Safety thermostat and thermostop device.
- Temperatures adjusted: Wash 60 °C and rinse 90 °C.
- Accessories supplied: 1 basket CP-16/18, 1 basket CT-10 and 4 baskets for cutlery CU-7.

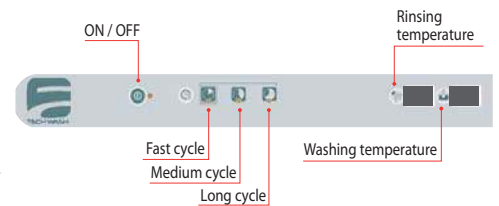


Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Power (kW)	Voltage (V)
TECH-500 DD	19013495	40	320	600 x 600 x 820	3,4	230V-50Hz



**TECH-500 HP – WITH HIGH POWER FEATURES**

- Electronic control panel.
- 3 washing cycles:
  - 60" / 90" / 180"
- Tank capacity: 25 l. / Heating power: 2.8 kw.
- Booster capacity: 7 l. / Heating power: 6 kw.
- Wash pump power: 0.6 kw.
- Rinsing consumption: 2.7 l/rinse.
- Built-in rinse aid dispenser.
- Anti backflow valve fitted.
- Safety thermostat and thermostop device.
- Additional filtering system with inox trays.
- Temperatures adjusted: Wash 60 °C and rinse 90 °C.
- Voltage: 380V-50Hz.
- Accessories supplied: 1 basket CP-16/18, 1 basket CT-10 and 4 baskets for cutlery CU-7.

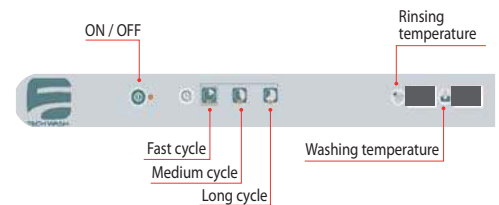


Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Power (kW)	Break tank	Rinsing pump	Detergent dispenser	Drain pump
TECH-500 HP	19013499	60	320	600 x 600 x 820	6,6	Not	Not	Not	Not
TECH-500 HP W	19013502	60	320	600 x 600 x 820	6,6	Yes	Yes	Yes	Not
TECH-500 HP B	19013501	60	320	600 x 600 x 820	6,6	Not	Not	Not	Yes
TECH-500 HP W B	19013503	60	320	600 x 600 x 820	6,6	Yes	Yes	Yes	Yes
TECH-500 HP DD	19013500	60	320	600 x 600 x 820	6,6	Not	Not	Yes	Not



**EASY-500**

- Electromechanical control panel.
- 1 washing cycle of 120".
- Tank capacity: 25 l. / Heating power: 2.8 kw.
- Booster capacity: 7 l. / Heating power: 2.8 kw.
- Wash pump power: 0.6 kw.
- Rinsing consumption: 2.7 l/rinse.
- Built-in rinse aid dispenser.
- Anti backflow valve fitted.
- Safety thermostat.
- Temperatures adjusted: Wash 60 °C and rinse 90 °C.
- Accessories supplied: 1 basket CP-16/18, 1 basket CT-10 and 1 baskets for cutlery CU-7.

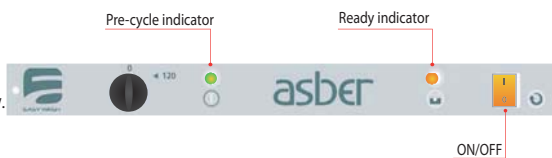


Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Power (kW)	Voltage (V)
EASY-500	19013470	30	320	600 x 600 x 820	3,4	230V-50Hz



**EASY-500 B – WITH DRAIN PUMP**

- Electromechanical control panel.
- 1 washing cycle of 120".
- Tank capacity: 25 l. / Heating power: 2.8 kw.
- Booster capacity: 7 l. / Heating power: 2.8 kw.
- Wash pump power: 0.6 kw.
- Rinsing consumption: 2.7 l/rinse.
- Built-in rinse aid dispenser and drain pump.
- Anti backflow valve fitted.
- Safety thermostat.
- Temperatures adjusted: Wash 60 °C and rinse 90 °C.
- Accessories supplied: 1 basket CP-16/18, 1 basket CT-10 and 1 baskets for cutlery CU-7.

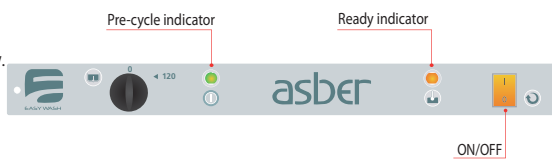

Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Power (kW)	Voltage (V)
EASY-500 B	19013472	30	320	600 x 600 x 820	3,4	230V-50Hz



**EASY-500 DD – WITH DETERGENT DISPENSER**

- Electromechanical control panel.
- 1 washing cycle of 120".
- Tank capacity: 25 l. / Heating power: 2.8 kw.
- Booster capacity: 7 l. / Heating power: 2.8 kw.
- Wash pump power: 0.6 kw.
- Rinsing consumption: 2.7 l/rinse.
- Built-in rinse aid dispenser and detergent dispenser.
- Anti backflow valve fitted.
- Safety thermostat.
- Temperatures adjusted: Wash 60 °C and rinse 90 °C.
- Accessories supplied: 1 basket CP-16/18, 1 basket CT-10 and 1 basket for cutlery CU-7.




Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Power (kW)	Voltage (V)
EASY-500 DD	19013471	30	320	600 x 600 x 820	3,4	230V-50Hz



**EASY-500 HP – WITH HIGH POWER FEATURES**

- Electromechanical control panel.
- 2 washing cycles:
  - 90" / 180"
- Tank capacity: 25 l. / Heating power: 2.8 kw.
- Booster capacity: 7 l. / Heating power: 6 kw.
- Wash pump power: 0.6 kw.
- Rinsing consumption: 2.7 l/rinse.
- Built-in rinse aid dispenser.
- Anti backflow valve fitted.
- Safety thermostat.
- Additional filtering system with inox trays.
- Temperatures adjusted: Wash 60 °C and rinse 90 °C
- Voltage: 380V-50Hz.
- Accessories supplied: 1 basket CP-16/18, 1 basket CT-10 and 4 baskets for cutlery CU-7.

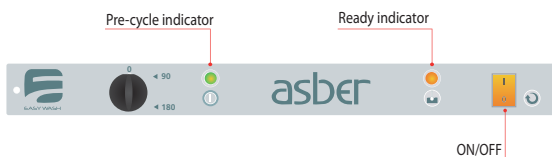

Model	Reference	Baskets hour	Clearance (mm)	Dimensions (mm)	Power (kW)	Break tank	Rinsing pump	Detergent dispenser	Drain pump
EASY-500 HP	19013475	40	320	600 x 600 x 820	6,6	Not	Not	Not	Not
EASY-500 HP B	19013477	40	320	600 x 600 x 820	6,6	Not	Not	Not	Yes
EASY-500 HP W B	19013479	40	320	600 x 600 x 820	6,6	Yes	Yes	Yes	Yes
EASY-500 HP DD	19013476	40	320	600 x 600 x 820	6,6	Not	Not	Yes	Not



Model	Reference	Voltage (V)	Washing cycles (seconds)	Power (kW)	Features
TECH-500	19013504	230V-60Hz	90/120/180	3,4	-
TECH-500 B	19013506	230V-60Hz	90/120/180	3,4	With drain pump
TECH-500 DD	19013505	230V-60Hz	90/120/180	3,4	With detergent dispenser
TECH-500 B DD	19020489	230V-50Hz	90/120/180	3,4	With drain pump / detergent dispenser
TECH-500HP	19013507	380V-60Hz	90/120/180	6,6	-
TECH-500 HP B	19013509	380V-60Hz	90/120/180	6,6	With drain pump
TECH-500 HP DD	19013508	380V-60Hz	90/120/180	6,6	With detergent dispenser
TECH-500 HP W	19013510	380V-60Hz	90/120/180	6,6	With break tank / rinsing pump / detergent dispenser
TECH-500 HP W B	19013511	380V-60Hz	90/120/180	6,6	With break tank / rinsing pump / detergent dispenser / drain pump
EASY-500	19013481	230V-60Hz	120	3,4	-
EASY-500 B	19013483	230V-60Hz	120	3,4	With drain pump
EASY-500 DD	19013482	230V-60Hz	120	3,4	With detergent dispenser
EASY-500 B DD	19020485	230V-50Hz	120	3,4	With drain pump and detergent dispenser
EASY-500 W UK B	19013473	230V-50Hz	120	2,8	With break tank / rinsing pump / detergent dispenser / drain pump
EASY-500 HP	19013484	380V-60Hz	90/180	6,6	-
EASY-500 HP B	19013486	380V-60Hz	90/180	6,6	With drain pump
EASY-500 HP DD	19013485	380V-60Hz	90/180	6,6	With detergent dispenser
EASY-500 HP	19013489	230V-60Hz	90/180	6,6	-
EASY-500 HP B	19013491	230V-60Hz	90/180	6,6	With drain pump
EASY-500 HP DD	19013490	230V-60Hz	90/180	6,6	With detergent dispenser
EASY-500 HP W UK B	19013493	230V-60Hz	90/180	6,6	With break tank / rinsing pump / detergent dispenser / drain pump

**SUPPLEMENT BASE**

- Base with removable door, to install under a front opening dishwasher, thus improving work ergonomics.
- It can also be used to lift the machine and drain water from the bucket freely with no need to install an additional pump, also to place containers with washing and polishing liquids.
- It includes 2 guides to store two 500 x 500 mm baskets.
- Entirely made of stainless steel.



Model	Reference	For use in	Height until opening door	Dimensions (mm)
PL-60	19017114	All models TECH-500 and EASY-500	780 mm	600 x 540 x 400