
***** Refrigerated counters

Asber European-line counters offers high quality and reliability to kitchen professionals in their daily tasks. Our equipment is specifically designed to provide hamonious space integration, food safety compliance, energy savings and a steady, interruption-free operation.





strong and durable, with added high thermal insulation, made to last longer. Easy-removable door gaskets. Hinged doors with automatic return and magnetic seal on all four sides for a perfect closing.



Drawers with perforated bottom plates and telescopic guide rails, capable of complete retraction, to economize working surface. Doors made of stainless steel,

ASBER REFRIGERATED COUNTERS OFFERS INDIVIDUAL SOLUTIONS FOR EVERY NEED:



Refrigerated counter with sink.



Refrigerated counter with 2 drawers.



Refrigerated counter with 3 drawers.



Refrigerated counter with glass doors.

Refrigerated counters 💥


Asber refrigerated counter saves more energy compared to other standard commercial refrigeration appliances due to its thick, CFC-free insulation that minimizes heat losses and reduces the compressor workload. Furthermore, our defrost system only activates according to presence of actual frost and operates for the time strictly needed to defrost, thereby reducing energy consumption. Asber counters also ensure high storage capacity, adapting to any space requirements with many different door and drawer options.

In short, Asber offers a whole set of solutions designed to provide a reliable and versatile product, which is environmentally friendly and great value for money.



TEMPERATURE CONTROL

Thermostat enables to adjust work and temperature parameters quickly and easily. Elegant design with touch-sensitive buttons, it monitors the temperature inside the counter at all times. Performs and controls automatic defrosting.



COUNTERTOP

Made of stainless steel, 50 mm high. Refrigerated counters are ergonomic and safe for kitchen professionals due to their rounded edges on the countertop and 100 mm high sanitary splashback.



STAINLESS STEEL LEGS

Easily adjustable in height (125 mm - 200 mm). With hidden screws to prevent dust and dirt build-up, thus ensuring maximum hygiene.



GUARANTEED CLEANLINESS

All asber-Eline refrigerated counters have a completely smooth interior surface with internal rounded edges to make cleaning operations easier, ensuring maximum hygiene.



GREAT INSULATION

All Asber refrigerated counters include injected, CFC–free, thick polyurethane insulation with a 40 Kg/m3 density, greatly reducing potential loss of cold air and resuling in better energy efficiency.



CONDENSING UNIT

Powerful cooling unit, including an automatic evaporation system of consensing water from defrosting. Easily removable through a simple guide rail system to facilitate maintenance.



Counter with a granite counter and ingredient display.



Counter with built-in compartment to accommodate GN pans.



Counter with removable hygienic polyethylene board.



Counter with granite countertop and built-in compartment to accommodate GN pans.





Handle integrated in the door.



Easy-to-remove gasket.





ETP-6-200-30





Compact, forced draft evaporator.

REFRIGERATED COUNTERS 600 SERIES

- Countertop manufactured in stainless steel with 100 mm sanitary backsplash.
- Compact design fully injected with stainless steel exterior panels.
- Internal body made of stainless steel.
- Doors with handles made of stainless steel.
- Doors equipped with self-closing hinge system and opening stopper.
- Internal shelves made with plastic-coated wires, easily removable for cleaning.
- Doors made in stainless steel. Durable and strong, with high thermal insulation. Include easily removable gaskets.
- Height-adjustable fastening brackets for shelves.
- Height-adjustable stainless steel legs.
- Drain inside the chamber.

- Control panel and engine ventilation with pivoting front opening.
- Sealed condensing unit with ventilated condenser.
- R-134A Refrigerant, CFC Free.
- Forced draft evaporator with anticorrosion coating.
- Automatic defrost evaporation.
- CFC-free, injection-moulded polyurethane insulation with a density of 40 Kg/m3.
- Start-stop light switch.
- Electronic temperature control and display.
- Temperature range: from -2 °C to +8 °C.
- Shelf provisions: 1 rack per door.
- Supply voltage: 230 V 1+N 50 Hz.
- Available with glass doors or without a countertop on request.

| Model | Reference | N° doors | Power (W) | Capacity (liters) | Dimensions (mm) |
|--------------|-----------|-------------|--------------|----------------------|--------------------|
| ETP-6-150-20 | 19023459 | 2 | 350 | 255 | 1492 x 600 x 850 |
| ETP-6-200-30 | 19023464 | 3 | 396 | 395 | 2017 x 600 x 850 |
| ETP-6-250-40 | 19023470 | 4 | 615 | 535 | 2542 x 600 x 850 |





Handle integrated in the door.



Easy-to-remove gasket.





Counter with sink.

REFRIGERATED COUNTERS WITH SINK 600 SERIES

- Countertop manufactured in stainless steel with 100 mm sanitary backsplash.
- The top is fitted with a 340 x 340 x 200 mm sink.
- Compact design fully injected with stainless steel exterior panels.
- Internal body made of stainless steel.
- Doors with handles made of stainless steel.
- Doors made in stainless steel. Durable and strong, with high thermal insulation. Include easily removable gaskets.
- Doors equipped with self-closing hinge system and opening stopper.
- Internal shelves made with plastic-coated wires, easily removable for cleaning.
- Height-adjustable fastening brackets for shelves.
- Height-adjustable stainless steel legs.
- Drain inside the chamber.

- Control panel and engine ventilation with pivoting front opening.
- Sealed condensing unit with ventilated condenser.
- R-134 A, CFC Free Ecologic Refrigerant.
- Forced draft evaporator with anticorrosion coating.
- Automatic defrost evaporation.
- CFC-free, injection-moulded polyurethane insulation with a density of 40 Kg/m3.
- Start-stop light switch.
- Electronic temperature control and display.
- Temperature range: from -2 °C to +8 °C.
- Number of shelves: 1 rack per door.
- Supply voltage: 230 V 1+N 50 Hz.
- Suitable to be placed in one line with EDENOX neutral furniture.

| Model | Reference | N° doors | Sink | Power (W) | Capacity (liters) | Dimensions (mm) |
|----------------|-----------|-------------|------|--------------|----------------------|--------------------|
| ETP-6-150-20 S | 19023460 | 2 | Yes | 350 | 255 | 1492 x 600 x 850 |
| ETP-6-200-30 S | 19023465 | 3 | Yes | 396 | 395 | 2017 x 600 x 850 |
| ETP-6-250-40 S | 19023471 | 4 | Yes | 615 | 535 | 2542 x 600 x 850 |





REFRIGERATED COUNTERS WITH DRAWERS

- Countertop manufactured in stainless steel with 100 mm sanitary backsplash.
- Compact design fully injected with stainless steel exterior panels.
- Internal body made of stainless steel.
- Doors with handles made of stainless steel.
- Doors equipped with self-closing hinge system and opening stopper.
- Doors made in stainless steel. Durable and strong, with high thermal insulation. Include easily removable gaskets.
- Drawers with incorporated handles made of stainless steel, with perforated bottom plates. Equipped with telescopic runners that allow sufficient retraction to economize working surface.
- Abailable with 2 or 3 drawer kit per 1 door.

- Internal shelves made with plastic-coated wires, easily removable for cleaning.
- Sealed condensing unit with ventilated condenser.
- R-134 A Refrigerant, CFC Free.
- Forced draft evaporator with anticorrosion coating.
- Automatic defrost evaporation.
- CFC-free, injection-moulded polyurethane insulation with a density of 40 Kg/m3.
- Start-stop light switch.
- Electronic temperature control and display.
- Temperature range: from -2 °C to +8 °C.
- Shelf Provisions: 1 rack per door.
- Supply voltage: 230 V 1+N 50 Hz.
- Suitable to be placed in one line with EDENOX neutral furniture.

| Model | Reference | N° doors | N° drawers | Power (W) | Capacity (liters) | Dimensions (mm) |
|--------------|-----------|-------------|---------------|--------------|----------------------|--------------------|
| ETP-6-150-12 | 19023458 | 1 | 2 | 350 | 255 | 1492 x 600 x 850 |
| ETP-6-150-04 | 19023539 | 0 | 4 | 350 | 255 | 1492 x 600 x 850 |
| ETP-6-200-22 | 19023463 | 2 | 2 | 396 | 395 | 2017 x 600 x 850 |
| ETP-6-200-14 | 19023462 | 1 | 4 | 396 | 395 | 2017 x 600 x 850 |
| ETP-6-200-06 | 19023541 | 0 | 6 | 396 | 395 | 2017 x 600 x 850 |
| ETP-6-250-32 | 19023469 | 3 | 2 | 615 | 535 | 2542 x 600 x 850 |
| ETP-6-250-24 | 19023468 | 2 | 4 | 615 | 535 | 2542 x 600 x 850 |
| ETP-6-250-16 | 19023467 | 1 | 6 | 615 | 535 | 2542 x 600 x 850 |
| ETP-6-250-08 | 19023466 | 0 | 8 | 615 | 535 | 2542 x 600 x 850 |



Drawers with telescopic guide rails,



Drawers with integrated handles.



Drawers with perforated bottom plates.





Strong, durable glass door.



Easy-to-remove gasket.



ETP-6-150-20 GLASS



ETP-6-200-30 GLASS



ETP-6-250-40 GLASS



Compact, forced draft evaporator.

REFRIGERATED COUNTERS WITH GLASS DOOR

- Countertop manufactured in stainless steel with 100 mm sanitary backsplash.
- Compact design fully injected with stainless steel exterior panels.
- Internal body made of stainless steel.
- Doors equipped with self-closing hinge system and opening stopper.
 Internal shelves made with plastic-coated wires, easily removable for cleaning.
- Durable glass doors with stainless steel handles.
- Easily removable gaskets.
- Height-adjustable fastening brackets for shelves.
- Height-adjustable stainless steel legs.
- Drain inside the chamber.

- Control panel and engine ventilation with pivoting front opening.
- Sealed condensing unit with ventilated condenser.
- R-134A Refrigerant, CFC Free.
- Forced draft evaporator with anticorrosion coating.
- Automatic defrost evaporation.
- CFC-free, injection-moulded polyurethane insulation with a density of 40 Kg/m3.
- Start-stop light switch.
- Electronic temperature control and display.
- Temperature range: from -2 °C to +8 °C.
- Shelf provisions: 1 rack per door.
- Supply voltage: 230 V 1+N 50 Hz.

| Model | Reference | N° doors | Power (W) | Capacity (liters) | Dimensions (mm) |
|--------------------|-----------|-------------|--------------|----------------------|--------------------|
| ETP-6-150-20 GLASS | 19022017 | 2 | 350 | 255 | 1492 x 600 x 850 |
| ETP-6-200-30 GLASS | 19022020 | 3 | 396 | 395 | 2017 x 600 x 850 |
| ETP-6-250-40 GLASS | 19030502 | 4 | 615 | 535 | 2542 x 600 x 850 |





Stainless steel countertop



Handle integrated in the door.



Compact, forced draft evaporator.



ETN-6-200-30



ETN-6-250-40

FREEZER COUNTERS

- Countertop manufactured in stainless steel with 100 mm sanitary backsplash.
- Compact design fully injected with stainless steel exterior panels.
- Internal body made of stainless steel.
- Doors with handles made of stainless steel.
- Doors equipped with self-closing hinge system and opening stopper.
- Internal shelves made with plastic-coated wires, easily removable for cleaning.
- Height-adjustable fastening brackets for shelves.
- The door frames feature a heating system to prevent ice accumulation.
- Height-adjustable stainless steel legs.
- Doors made in stainless steel. Durable and strong, with high thermal insulation. Include easily removable gaskets.
- Drain inside the chamber.

- Control panel and engine ventilation with pivoting front opening.
- Sealed condensing unit with ventilated condenser.
- R-404 A CFC Free Ecologic Refrigerant.
- Automatic defrost evaporation.
- CFC-free, injection-moulded polyurethane insulation with a density of 40 Kg/m3.
- Forced draft evaporator with anticorrosion coating.
- Electronic temperature control and display.
- Start-stop light switch.
- Temperature range: from -18 °C to -22 °C.
- Shelf provisions: 1 rack per door.
- Supply voltage: 230 V 1+N 50 Hz.
- Suitable to be placed in one line with EDENOX neutral furniture.

| Model | Reference | N° doors | Power (W) | Capacity (liters) | Dimensions (mm) |
|--------------|-----------|-------------|--------------|----------------------|--------------------|
| ETN-6-150-20 | 19023445 | 2 | 880 | 255 | 1492 x 600 x 850 |
| ETN-6-200-30 | 19023447 | 3 | 880 | 395 | 2017 x 600 x 850 |
| ETN-6-250-40 | 19023449 | 4 | 1014 | 535 | 2542 x 600 x 850 |





Stainless steel countertop.



Easy-to-remove gasket.



Counter with sink.





ETN-6-200-30 S



ETN-6-150-20 S



ETN-6-200-30 S

FREEZER SNACK COUNTERS WITH SINK

- Countertop manufactured in stainless steel with 100 mm sanitary backsplash.
- The top is fitted with a 340 x 340 x 200 mm sink. Model ETN-6-250-40-S made with a round sink Ø 260 mm.(130 mm depth)
- Compact design fully injected with stainless steel exterior panels.
- Internal body made of stainless steel.
- Doors with handles made of stainless steel.
- Doors equipped with self-closing hinge system and opening stopper.
- Internal shelves made with plastic-coated wires, easily removable for cleaning.
- Height-adjustable fastening brackets for shelves.
- The door frames feature a heating system to prevent ice accumulation.
- Height-adjustable stainless steel legs.
- Doors made in stainless steel. Durable and strong, with high thermal insulation. Include easily removable gaskets.
- Drain inside the chamber.

- Control panel and engine ventilation with pivoting front opening.
- Sealed condensing unit with ventilated condenser.
- R-404 A CFC Free Ecologic Refrigerant.
- Automatic defrost evaporation.
- CFC-free, injection-moulded polyurethane insulation with a density of 40 Kg/m3.
- Forced draft evaporator with anticorrosion coating.
- Electronic temperature control and display.
- Start-stop light switch.
- Temperature range: from -18 °C to -22 °C.
- Shelf provisions: 1 rack per door.
- Supply voltage: 230 V 1+N 50 Hz.
- Suitable to be placed in one line with EDENOX neutral furniture

| Model | Reference | N° doors | Sink | Power (W) | Capacity (liters) | Dimensions (mm) |
|----------------|-----------|-------------|------|--------------|----------------------|--------------------|
| ETN-6-150-20 S | 19023446 | 2 | Yes | 880 | 255 | 1492 x 600 x 850 |
| ETN-6-200-30 S | 19023448 | 3 | Yes | 880 | 395 | 2017 x 600 x 850 |
| ETN-6-250-40 S | 19023450 | 4 | Yes | 1014 | 535 | 2542 x 600 x 850 |

nd engine ventilation with pivot





Compact, forced draft evaporator.



Easy-to-remove gasket.



Stainless steel countertop.



ETP-7-180-30



GASTRONORM REFRIGERATED COUNTER GN 1/1 SERIES

- Countertop manufactured in stainless steel with 100 mm sanitary backsplash.
- Compact design fully injected with stainless steel exterior panels.
- Internal body made of stainless steel.
- Doors with handles made of stainless steel.
- Doors made in stainless steel. Durable and strong, with high thermal insulation. Include easily removable gaskets.
- Doors equipped with self-closing hinge system and opening stopper.
 Internal shelves made with plastic-coated wires, easily removable for
- cleaning.Height-adjustable fastening brackets for shelves.
- Height-adjustable tasterning brackets i
 Height-adjustable stainless steel legs.
- Drain inside the chamber.
- Control panel and engine ventilation with pivoting front opening.

- Sealed condensing unit with ventilated condenser.
- R-134 A Ecologic Refrigerant, CFC Free.
- Forced draft evaporator with anticorrosion coating.
- Automatic defrost evaporation.
- CFC-free, injection-moulded polyurethane insulation with a density of 40 Kg/m3.
- Start-stop light switch.
- Electronic temperature control and display.
- Standard:1 GN 1/1 rack and two sets of guides per door.
- Temperature range: from -2 °C to +8 °C.
- Supply voltage: 230 V 1+N 50 Hz.
- On request available with solid or glazed doors and without a countertop.
- Suitable to be placed in one line with EDENOX neutral furniture.

| Model | Reference | N° doors | Power (W) | Capacity (liters) | Dimensions (mm) |
|--------------|-----------|-------------|--------------|----------------------|--------------------|
| ETP-7-135-20 | 19023474 | 2 | 350 | 290 | 1342 x 700 x 850 |
| ETP-7-180-30 | 19023480 | 3 | 396 | 452 | 1792 x 700 x 850 |
| ETP-7-225-40 | 19023487 | 4 | 615 | 615 | 2242 x 700 x 850 |



ETP-7-135-20 S

ETP-7-180-30 S



ETP-7-225-40 S



Compact, forced draft evaporator.

GASTRONORM REFRIGERATED COUNTERS WITH SINK GN 1/1 SERIES

- ٠ Countertop manufactured in stainless steel with 100 mm sanitary backsplash.
- The top is fitted with a 340 x 340 x 200 mm sink.
- Compact design fully injected with stainless steel exterior panels.
- Internal body made of stainless steel.
- Doors with handles made of stainless steel.
- Doors equipped with self-closing hinge system and opening stopper.
- Doors made in stainless steel. Durable and strong, with high thermal insulation. Include easily removable gaskets.
- Internal shelves made with plastic-coated wires, easily removable for cleaning.
- Height-adjustable fastening brackets for shelves.
- Height-adjustable stainless steel legs.

- Drain inside the chamber.
 - Control panel and engine ventilation with pivoting front opening.
- Sealed condensing unit with ventilated condenser. •
 - R-134 A CFC Free Ecologic Refrigerant.
 - Forced draft evaporator with anticorrosion coating.
 - Automatic defrost evaporation.
 - CFC-free, injection-moulded polyurethane insulation with a density of 40 Kg/m3.
 - Start-stop light switch.
 - Electronic temperature control and display.
 - Temperature range: from -2 °C to +8 °C.
 - Standard: 1 GN 1/1 rack and two sets of guides per door.
 - Supply voltage: 230 V 1+N 50 Hz.
 - Available either with solid doors or with glazed doors.
 - Suitable to be placed in one line with EDENOX neutral furniture.

| Model | Reference | N° doors | Sink | Power (W) | Capacity (liters) | Dimensions (mm) |
|----------------|-----------|-------------|------|--------------|----------------------|--------------------|
| ETP-7-135-20 S | 19023476 | 2 | Yes | 350 | 290 | 1342 x 700 x 850 |
| ETP-7-180-30 S | 19023482 | 3 | Yes | 396 | 452 | 1792 x 700 x 850 |
| ETP-7-225-40 S | 19023489 | 4 | Yes | 615 | 615 | 2242 x 700 x 850 |







Drawers with telescopic guide rails,



Drawers with integrated handles.



Drawers with perforated bottom plates.

GASTRONORM REFRIGERATED COUNTER WITH DRAWERS GN 1/1 SERIES

- Countertop manufactured in stainless steel with 100 mm sanitary backsplash.
- Compact design fully injected with stainless steel exterior panels.
- Internal body made of stainless steel.
- Doors with handles made of stainless steel.
- Doors equipped with self-closing hinge system and opening stopper.
- Doors made in stainless steel. Durable and strong, with high thermal insulation. Include easily removable gaskets.
- Drawers with embedded handles made of stainless steel, with perforated bottom plates and telescopic runners capable of sufficient retraction to economize working surface.
- Available with 2 or 3 drawer kit per 1 door.
- Internal shelves made with plastic-coated wires, easily removable

- for cleaning.
- Sealed condensing unit with ventilated condenser.
- R-134 A Ecologic Refrigerant, CFC Free.
- Forced draft evaporator with anticorrosion coating.
- Automatic defrost evaporation.
- CFC-free, injection-moulded polyurethane insulation with a density of 40 Kg/m3.
- Start-stop light switch.
- Electronic temperature control and display.
- Temperature range: from -2 °C to +8 °C.
- Standard: 1 GN 1/1 rack and two sets of guides per door.
- Supply voltage: 230 V 1+N 50 Hz.
- Suitable to be placed in one line with EDENOX neutral furniture.

| Model | Reference | N° doors | N° drawers | Power (W) | Capacity (liters) | Dimensions (mm) |
|--------------|-----------|-------------|---------------|--------------|----------------------|--------------------|
| ETP-7-135-12 | 19023473 | 1 | 2 | 350 | 290 | 1342 x 700 x 850 |
| ETP-7-135-04 | 19023472 | 0 | 4 | 350 | 290 | 1342 x 700 x 850 |
| ETP-7-180-22 | 19023479 | 2 | 2 | 396 | 452 | 1792 x 700 x 850 |
| ETP-7-180-14 | 19023478 | 1 | 4 | 396 | 452 | 1792 x 700 x 850 |
| ETP-7-180-06 | 19023477 | 0 | 6 | 396 | 452 | 1792 x 700 x 850 |
| ETP-7-225-32 | 19023486 | 3 | 2 | 615 | 615 | 2242 x 700 x 850 |
| ETP-7-225-24 | 19023485 | 2 | 4 | 615 | 615 | 2242 x 700 x 850 |
| ETP-7-225-16 | 19023484 | 1 | 6 | 615 | 615 | 2242 x 700 x 850 |
| ETP-7-225-08 | 19023483 | 0 | 8 | 615 | 615 | 2242 x 700 x 850 |





Compact, forced draft evaporator.



Strong, durable glass door.



ETP-7-135-20 GLASS

ETP-7-180-30 GLASS



ETP-7-225-40 GLASS



Stainless steel countertop.

GASTRONORM REFRIGERATED COUNTER WITH GLASS DOOR GN 1/1 SERIES

- Countertop manufactured in stainless steel with 100 mm sanitary backsplash.
- Compact design fully injected with stainless steel exterior panels.
- Internal body made of stainless steel.
- Durable glass doors with stainless steel handles.
- Easily removable gaskets.
- Doors equipped with self-closing hinge system and opening stopper.
 Internal shelves made with plastic-coated wires, easily removable for
- Internal shelves made with plastic-coated wires, easily removable to cleaning.
- Height-adjustable fastening brackets for shelves.
- Height-adjustable stainless steel legs.
- Drain inside the chamber.

- Control panel and engine ventilation with pivoting front opening.
- Sealed condensing unit with ventilated condenser.
- R-134 A Ecologic Refrigerant, CFC Free.
- Forced draft evaporator with anticorrosion coating.
- Automatic defrost evaporation.
- CFC-free, injection-moulded polyurethane insulation with a density of 40 Kg/m3.
- Start-stop light switch.
- Electronic temperature control and display.
- Standard:1 GN 1/1 rack and two sets of guides per door.
- Temperature range: from -2 °C to +8 °C.
- Supply voltage: 230 V 1+N 50 Hz.

| Model | Reference | N° doors | Power (W) | Capacity (liters) | Dimensions (mm) |
|--------------------|-----------|-------------|--------------|----------------------|--------------------|
| ETP-7-135-20 GLASS | 19031867 | 2 | 350 | 290 | 1342 × 700 × 850 |
| ETP-7-180-30 GLASS | 19022042 | 3 | 396 | 452 | 1792 x 700 x 850 |
| ETP-7-225-40 GLASS | 19022049 | 4 | 615 | 615 | 2242 x 700 x 850 |



ETN-7-135-20-S

ETN-7-180-30 S





Easy-to-remove gasket. Compact, forced draft



evaporator. Counter with sink (models



with S).

GASTRONORM FREEZER COUNTERS. GASTRONORM FREEZER COUNTERS WITH SINK

- Countertop manufactured in stainless steel with 100 mm sanitary backsplash.
- The top is fitted with a 340 x 340 x 200 mm sink. Model ETN-7-225-40-S made with a round sink Ø 260 mm. (130 mm depth)
- · Compact design fully injected with stainless steel exterior panels.
- Internal body made of stainless steel.
- Doors with handles made of stainless steel.
- Doors equipped with self-closing hinge system and opening stopper.
- Doors made in stainless steel. Durable and strong, with high thermal insulation. Include easily removable gaskets.
- Internal shelves made with plastic-coated wires, easily removable for cleaning


- Height-adjustable fastening brackets for shelves.
 - The door frames feature a heating system to prevent ice accumulation.
 - Height-adjustable stainless steel legs.
 - Drain inside the chamber.
 - Control panel and engine ventilation grill with pivoting front opening.
 - Sealed condensing unit with ventilated condenser.
 - R-404 A CFC Free Ecologic Refrigerant.
 - Forced draft evaporator with anticorrosion coating.
 - Automatic defrost evaporation.
 - CFC-free, injection-moulded polyurethane insulation with a density of 40 Kg/ m3.
 - Electronic temperature control and display.
 - Temperature range: -18 °C to -22 °C.
 - Standard: 1 GN 1/1 rack and two sets of guides per door.
 - Supply voltage: 230 V 1+N 50 Hz.

| Model | Reference | N° doors | Sink | Power (W) | Capacity (liters) | Dimensions (mm) |
|----------------|-----------|-------------|------|--------------|----------------------|--------------------|
| ETN-7-135-20 | 19023451 | 2 | No | 880 | 299 | 1342 x 700 x 850 |
| ETN-7-180-30 | 19023453 | 3 | No | 880 | 425 | 1792 x 700 x 850 |
| ETN-7-225-40 | 19023455 | 4 | No | 1014 | 615 | 2242 x 700 x 850 |
| ETN-7-135-20 S | 19023452 | 2 | Yes | 880 | 299 | 1342 x 700 x 850 |
| ETN-7-180-30 S | 19023454 | 3 | Yes | 880 | 425 | 1792 x 700 x 850 |
| ETN-7-225-40 S | 19023456 | 4 | Yes | 1014 | 615 | 2242 x 700 x 850 |





Worktop height from 850 to 900 mm.



Drawer's height.

GASTRONORM REFRIGERATED COUNTERS GN 2/3 SERIES - 600 MM HEIGHT

- Counters specially designed for use as a refrigerated support for cooking, preparation and storage appliances.
- A height of 600 mm enables the working distance between the equipment from 850 mm to 900 mm.
- Compact design fully injected in stainless steel exterior panels.
- Countertop with 100 mm sanitary backsplash.
- Countertop and internal body made of stainless steel.
- Height-adjustable stainless steel legs.
- Drawers made of stainless steel with incorporated handle and perforated bottom plates. Equipped with telescopic runners that allow sufficient retraction to economize working surface.
- In all models, the box adjacent to the refrigeration unit has a depth of 200mm and a usable height of 250 mm.

- Drawers adapted for pans with 100 and 200 mm depth.
 - Drain inside the chamber.
 - Forced draft evaporator with anticorrosion coating.
 - Automatic defrost water evaporation.
 - Sealed condensing unit with ventilated condenser.
 - R-134 A CFC Free Ecologic Refrigerant.
 - CFC-free, injection-moulded polyurethane insulation with a density of 40 Kg/m3.
 - Start-stop light switch.
 - Electronic temperature control and display.
 - Temperature: -2 °C to +8 °C.
 - Supply voltage: 230 V 1+N 50 Hz.

| Model | Reference | N° drawers | Capacity (liters) | Power (W) | Compressor (W) | Dimensions (mm) |
|----------|-----------|---------------|----------------------|--------------|-------------------|--------------------|
| ETPB-135 | 19023499 | 2 | 255 | 368 | 250 | 1342 x 700 x 584 |
| ETPB-180 | 19023500 | 3 | 360 | 414 | 300 | 1792 x 700 x 584 |
| ETPB-225 | 19023501 | 4 | 550 | 414 | 300 | 2242 x 700 x 584 |







Saladette countertop able to accommodate GN pans.



Saladette with granite countertop and ingredient display.





SALADETTES

- Stainless steel construction.
- Forced air circulation system in the storage cabinet.
- Temperature range: -2 °C to 8 °C.
- High-class controller with a digital temperature display compliance to the HACCP system.
- Bottom-mounted refrigerating unit.
- Polyurethane wall thermal insulation injected at high pressure, 60 mm thick, density 40 kg/m3, CFC-free.
- Self-closing door.
- Automatic evaporation of defrost water.
- 1 couple of sliding guides and 1 GN 1/1 grid shelf per door as standard option.
- Height-adjustable shelves.
- Supply voltage: 230 V 1+N 50 Hz.
- Refrigerated saladette with flat worktop.

Model ETS-100 SP:

- Stainless steel worktop without splashback.
- Refrigerated saladette with hinged lid.
- Model ETS-100:
- Capable of housing 2 x GN 1/1 pans of 200 mm depth and 2 x GN 1/4 of 100 mm depth (not included as standard options).
- Stainless steel lid for toppings well, with interlocking device at fullopened position.
- Removable polyethylene board for chopping.
- Refrigerated saladette with sneeze glass canopy.
- Model ETS-100 G:
- Work surface made of granite.
- Capable of housing 5 x GN 1/6 pans of 100 mm depth (not included as standard options), protected with a glass canopy.

| Model | Reference | N° doors | Power (W) | Capacity (liters) | Dimensions (mm) |
|------------|-----------|-------------|--------------|----------------------|--------------------|
| ETS-100 SP | 19023506 | 2 | 368 | 200 | 906 x 700 x 894 |
| ETS-100 | 19023504 | 2 | 368 | 200 | 906 x 700 x 894 |
| ETS-100 G | 19023505 | 2 | 368 | 200 | 906 x 700 x 894 |



PIZZA REFRIGERATED COUNTERS

- Countertop in stainless steel
- Internal body made in stainless steel.
- Doors with handles made in stainless steel.
- Doors equipped with self-closing hinge system and opening stopper.
- Doors made in stainless steel. Durable and strong, with high thermal insulation. Include easily removable gaskets.
- Internal shelves of plastic-coated wires, easily removable for cleaning.
- Height-adjustable fastening brackets for shelves.
- Height-adjustable stainless steel legs.
- Control panel and engine ventilation with pivoting front opening.
- Sealed condensing unit with ventilated condenser.
- R-134 A, CFC Free Ecologic Refrigerant.
- Forced draft evaporator with anticorrosion coating.
- Automatic defrost evaporation.
- Drain inside the chamber.
- CFC-free, injection-moulded polyurethane insulation with a density of 40 Kg/m3.

- Start-stop light switch.
- Electronic temperature control and display.
- Temperature of -2 °C to +8 °C.
- Supply voltage: 230 V 1+N 50 Hz.
- Models ETPZ:
- Built-in neutral container to house GN 1/4 pans of 150 mm depth (not included as standard option).
- Stainless steel hinged lid with opening position at 90°.
- Pans are refrigerated by coming into contact with the lower cabinet.
- Number of Gastronorm pans:
- ETPZ-135 = 8
- ETPZ-180 = 10

Models ETS:

- Housing on tabletop for GN pans (not included as standard option).
- Stainless steel lid (with fixed opening position).
- Doors with automatic locking device and fixed opening.

| Model | Reference | N° doors | Power (W) | Capacity (liters) | Dimensions (mm) |
|----------|-----------|-------------|--------------|----------------------|--------------------|
| ETPZ-135 | 19023502 | 2 | 368 | 290 | 1345 x 700 x 1050 |
| ETPZ-180 | 19023503 | 3 | 414 | 452 | 1795 x 700 x 1050 |
| ETS-135 | 19023507 | 2 | 345 | 300 | 1342 x 700 x 850 |
| ETS-180 | 19023508 | 3 | 532 | 500 | 1792 x 700 x 850 |



ETP-7-135-20 G

ETP-7-180-30 G



GRANITE WORKTOP PIZZA COUNTERS 700 AND 800 SERIES FOR GN 1/1

- Granite worktop pizza counter composition is made up of a set consisting of:
- Refrigerated counters at the bottom (models on this page).
- Refrigerated countertop display on the top (models on the following pages).
- Countertop, rear and side splash back in granite.
- In 800 Series, the countertop side splash back is 150 to 250 mm and 250 mm rear splash back.
- In 700 Series, the countertop side and rear splash back is 120 mm high.
- Compact design fully injected in stainless steel exterior panels.
- Internal body made in stainless steel.
- Doors with handles made in stainless steel.
- Doors equipped with self-closing hinge system and opening stopper.
- Doors made in stainless steel. Durable and strong, with high thermal

insulation. Include easily removable gaskets.

• Plasticized wire interior shelves, partially removable for cleaning.

ETP-7-180-30 G + EV-180

- Height-adjustable fastening brackets for shelves.
- Height-adjustable stainless steel legs.
- Control panel and engine ventilation with pivoting front opening.
- Sealed condensing unit with ventilated condenser.
- R-134 A CFC Free Ecologic Refrigerant.
- Forced draft evaporator with anticorrosion coating.
- Automatic defrost evaporation.
- CFC-free, injection-moulded polyurethane insulation with a density of 40 Kg/m3.
- Start-stop light switch.
- Electronic temperature control and display.
- Temperature of -2 °C to +8 °C.
- Standard: 1 GN 1/1 rack and two sets of guides per door in 700 Series; 1 rack 400x600 mm and two sets of guides per door in 800 Series
- Supply voltage: 230 V 1+N 50 Hz.
- Drawers are neutral.

| Model | Reference | N° drawers | N° GN containers | Power (W) | Capacity (liters) | Dimensions (mm) |
|----------------|-----------|---------------|---------------------|--------------|----------------------|--------------------|
| ETP-7-135-20 G | 19023475 | 2 | 0 | 368 | 290 | 1342 x 700 x 850 |
| ETP-7-180-30 G | 19023481 | 3 | 0 | 414 | 452 | 1792 x 700 x 850 |
| ETP-7-225-40 G | 19023488 | 4 | 0 | 300 | 615 | 2242 x 700 x 850 |
| ETP-8-150-20 | 19023490 | 2 | 0 | 368 | 404 | 1492 x 800 x 850 |
| ETP-8-200-27 | 19023492 | 2 | 7 | 368 | 404 | 2017 x 800 x 850 |
| ETP-8-200-24 | 19023491 | 2 | 4 | 368 | 404 | 2017 x 800 x 850 |
| ETP-8-200-30 | 19023493 | 3 | 0 | 414 | 606 | 2017 x 800 x 850 |
| ETP-8-250-37 | 19023495 | 3 | 7 | 414 | 606 | 2542 x 800 x 850 |
| ETP-8-250-34 | 19023494 | 3 | 4 | 414 | 606 | 2542 x 800 x 850 |
| ETP-8-250-40 | 19023496 | 4 | 0 | 500 | 684 | 2542 × 800 × 850 |
| ETP-8-300-47 | 19023498 | 4 | 7 | 500 | 684 | 3067 x 800 x 850 |
| ETP-8-300-44 | 19023497 | 4 | 4 | 500 | 684 | 3067 x 800 x 850 |



VAP-139-CDS

SUSHI DISPLAYS


- Integrated stainless steel base pan, perforated and ready for placing sushi plates on top.
- Accessible through a sliding glass door.
- Include an emergency cleaning drain for waste water.
- Static cooling with a double evaporation system.
- Working temperature of -1°C/2°C, at a room temperature of 27°C.

VAP-175-CDS


- Exterior covering with anodised aluminium profile.
- Sliding glass doors.
- Methacrylate sides.
- Airtight compressor with fan-assisted condenser. R-134a refrigerant.
- Electronic and digital control system of temperature and defrost.
- Main switch.

| Model | Reference | Working Temperature | Capacity (liters) | Power (W) | Dimensions (mm) |
|-------------|-----------|------------------------|----------------------|--------------|--------------------|
| VAP-139-CDS | 19015803 | -1°C / +2°C | 237 | 257 | 1395 x 400 x 250 |
| VAP-175-CDS | 19015806 | -1°C / +2°C | 237 | 257 | 1750 × 400 × 250 |









COUNTERTOP REFRIGERATED DISPLAY

- Body made in stainless steel.
- Accessible through a sliding glass door.
- Curved glass display surface.
- Suitable to hold GN 1/3 pans, 40 mm deep (pans not included).
- Interior with rounded edges to make cleaning operations easier.
- Built-in refrigerating unit.
- Drain inside the chamber.

- CFC-Free R-134 A ecological cooling.
- Built-in interior lighting.
- Start-stop light switch.
- Elecronic temperature control and display.
- Working temperature of -2 °C to +8 °C at +32 °C room temperature
- Voltage: 230 V 1+N 50/60 Hz.

| Model | Reference | GN containers | Power (W) | Dimensions (mm) |
|-----------|-----------|------------------|--------------|--------------------|
| VAP-139 C | 19005184 | 6 x GN 1/3 | 345 | 1395 × 400 × 250 |
| VAP-175 C | 19005487 | 8 x GN 1/3 | 368 | 1750 x 400 x 250 |

***** Countertop refrigerated display for GN pans

COUNTERTOP REFRIGERATED DISPLAY FOR GN PANS

- Interior and exteror made in stainless steel.
- Two versions available: glazed EV models, EVL models with stainless steel lid.
- Models EV-154, EV-204 and EV-254 adapted to hold GN 1/3 pans up to 150 mm deep. Other models suitable for GN 1/4 pans, 150 mm depth.
- Interior with curved joints to facilitate cleaning.
- Refrigerating unit built-in.

- Interior lighting with protection.
- Start-stop light switch.
- Cold plate cooling.
- R-134 ACFC Free Ecologic Refrigerant.
- Electronic temperature control and display.
- Drain provided.
- Temperature from +4 °C to +8 °C.
- Supply voltage: 230 V 1+N 50 Hz.







EV-180



F



| Model | Reference | GN containers | Dimensions (mm) |
|---------|-----------|------------------|--------------------|
| EV-135 | 19023509 | 5 x GN 1/4 | 1344 x 336 x 450 |
| EV-150 | 19023510 | 6 x GN 1/4 | 1494 x 336 x 450 |
| EV-154 | 19023511 | 6 x GN 1/3 | 1492 x 396 x 450 |
| EV-180 | 19032946 | 8 x GN 1/4 | 1792 x 336 x 450 |
| EV-200 | 19023513 | 9 x GN 1/4 | 2017 x 336 x 450 |
| EV-204 | 19023514 | 9 x GN 1/3 | 2017 x 396 x 450 |
| EV-250 | 19023515 | 12 x GN 1/4 | 2542 x 336 x 450 |
| EV-254 | 19023516 | 12 x GN 1/3 | 2542 x 396 x 450 |
| EVL-135 | 19023517 | 5 x GN 1/4 | 1342 x 336 x 283 |
| EVL-150 | 19023518 | 6 x GN 1/4 | 1492 x 336 x 283 |
| EVL-154 | 19023519 | 6 x GN 1/3 | 1492 x 336 x 283 |
| EVL-180 | 19023520 | 8 x GN 1/4 | 1792 x 336 x 313 |
| EVL-200 | 19023521 | 9 x GN 1/4 | 2017 x 336 x 313 |
| EVL-204 | 19023522 | 9 x GN 1/3 | 2017 x 336 x 313 |
| EVL-250 | 19023523 | 12 x GN 1/4 | 2542 x 336 x 313 |
| EVL-254 | 19023524 | 12 x GN 1/3 | 2542 x 336 x 313 |



BACK BAR BOTTLE COOLER

- Plastic-coated aluminum body with black finish.
- Plastic-coated galvanized steel interior, light gray finish.
- Plastic profile as thermal conductor between interior and exterior
- body.Internal light.
- Plastic door with Low-E glass for high termal insulation.
- Adjustable, plastic-coated steel interior racks.
- Shelves supplied as standard option: 1 rack per door.
- CFC-Free R-134 A ecological cooling.
- CFC-Free injection-moulded polyurethane insulation with a density of 40 Kg/m3.
- Sealed condensing unit with ventilated condenser.
- Shelves easy to take off for cleaning.
- Automatic defrost evaporation.
- Copper tube and aluminum fins evaporator.
- Door gasket easy to remove.
- Integrated lock for doors (except in ERMAS -250 model).
- High-class controller with a digital temperature display conformant to the HACCP system.
- Working temperature of +4 °C to +8 °C at +32 °C room temperature
- Voltage: 230 V 1+N 50/60 Hz.
- (ERMAS-250 model with sliding doors)



ERMA-150



ERMA-250



ERMA-350

| N4l - l | Model Reference | N° doors | Capacity | | Power | Dimensions |
|-----------|-----------------|-------------|----------|---------|-------|------------------|
| IVIOdei | | | liters | Bottles | (VV) | (mm) |
| ERMA-150 | 19029922 | 1 | 135 | 96 | 276 | 625 x 540 x 905 |
| ERMA-250 | 19029920 | 2 | 190 | 156 | 400 | 925 x 540 x 905 |
| ERMA-350 | 19029924 | 3 | 295 | 240 | 450 | 1375 x 540 x 905 |
| ERMAS-250 | 19029626 | 2 | 190 | 156 | 400 | 925 x 540 x 905 |

STAINLESS STEEL BAR BOTTLE COOLER

- Stainless steel body with satin finish.
- Plastic-coated galvanized steel interior, light gray finish.
- Plastic profile as thermal conductor between interior and exterior
- body.Internal light.
- Plastic door with Low-E glass for high termal insulation.
- Adjustable, plastic-coated steel interior racks.
- Shelves supplied as standard option: 1 rack per door.
- CFC-Free R-134 A ecological cooling.
- CFC-Free injection-moulded polyurethane insulation with a density of 40 Kg/m3.
- Sealed condensing unit with ventilated condenser.
- Shelves easy to take off for cleaning.
- Automatic defrost evaporation.
- Copper tube and aluminum fins evaporator.
- Door gasket easy to remove.
- Integrated lock for doors
- High-class controller with a digital temperature display conformant to the HACCP system.
- Working temperature of +4 °C to +8 °C at +32 °C room temperature
- Voltage: 230 V 1+N 50/60 Hz.




ERMAX-250



ERMAX-350

| Model | Reference | N° | Capacity | | Power | Dimensions |
|-----------|-----------|-------|----------|---------|-------|------------------|
| Woder | Reference | doors | liters | Bottles | (VV) | (mm) |
| ERMAX-150 | 19031876 | 1 | 135 | 96 | 276 | 625 x 540 x 905 |
| ERMAX-250 | 19031881 | 2 | 190 | 156 | 400 | 925 x 540 x 905 |
| ERMAX-350 | 19031882 | 3 | 295 | 240 | 450 | 1375 x 540 x 905 |

***** Refrigerated counter accessories

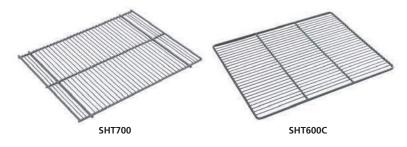

SHELVES FOR COUNTERS

- Shelves made of plasticized wires. Easily removable.
- Mounted on rails or brackets.
- The 600 table compartments are:
- 150: 2 extreme
- 200: 2 extreme and 1 central
- 250: 2 extreme and 2 central

| Model | Reference | Dimensions (mm) | Family | For Models | Characteristics | |
|---------|-----------|--------------------|-------------|--------------|------------------------|--|
| SHT600C | 19023529 | 405 x 525 | 600 Series | ETP-6, ETN-6 | Central rack | |
| SHT600S | 19023530 | 405 x 460 | 600 Series | ETP-6, ETN-6 | Side rack | |
| SHT700 | 19023531 | 530 x 325 | 700 Series | ETP-7, ETN-7 | Gastronorm rack GN 1/1 | |
| SHT800P | 19023532 | 400 x 600 | Pizza table | ETP-8 | Rack for pizza table | |



GUIDES FOR COUNTERS

- U-shaped stainless steel guides.
- Equipped with tabs for easy removal.

| Model | Reference | Dimensions (mm) | Family | For Models | Characteristics |
|-----------|-----------|--------------------|--------------|--------------|-----------------------------------|
| SGT600 | 19023525 | - | 600 Series | ETP-6, ETN-6 | Set of sliding guides for drawers |
| SGT700 | 19023526 | - | 700 Series | ETP-7, ETN-7 | Set of sliding guides for drawers |
| SGT700ETS | 19023527 | 562 | Salad tables | ETS | Set of sliding guides for racks |
| SGT800P | 19023528 | 649 | Pizza Tables | ETP-8 | Set of sliding guides for racks |

REFRIGERATED COUNTER OPTIONS

| Models | Options | Description |
|---------|-----------------------------|--------------------------|
| RI-T-S | Stainless Steel Back Panel | Length < 1,45 m |
| RI-T-M | Stainless Steel Back Panel | 1,45 m < Length < 1,95 m |
| RI-T-L | Satainless Steel Back Panel | 1,95 m < Length < 2,45 m |
| RI-T-XL | Stainless Steel Back Panel | 2,45 m < Length |
| SE-T-S | Models without top | Length < 1,45 m |
| SE-T-M | Models without top | 1,45 m < Length < 1,95 m |
| SE-T-L | Models without top | 1,95 m < Length < 2,45 m |
| SE-T-XL | Models without top | 2,45 m < Length |
| GR-T | Granit Countertop | Per meter |
| R-4 | Wheel kit | 4 pack 2 with brake |
| R-6 | Wheel Kit | 6 pack 3 with brake |
| REMOTE | Remote Units | - |

* REFRIGERATION REFRIGERATED CABINETS European line

| Refrigerated cabinets | 126-127 |
|---|---------|
| Snack cabinets | |
| Snack refrigerated cabinets (single body) | 128 |
| Snack refrigerated cabinets (double body) | 129 |
| Snack refrigerated display cabinets | 130 |
| Snack freezer cabinets | 131 |
| Snack refrigerated cabinets with frozen compartment | 132 |
| Snack mixed cabinet (refrigerator + freezer) | 133 |
| Gastronorm cabinets | |
| Gastronorm refrigerated cabinets (single body) | 134 |
| Gastronorm refrigerated cabinets (double body) | 135 |
| Gastronorm refrigerated display cabinets | 136 |
| Gastronorm freezer cabinets | 137 |
| Gastronorm dual-temperature refrigerated cabinets | 138 |
| Gastronorm refrigerated cabinet with frozen compartment | 139 |
| Gastronorm mixed cabinet (refrigerator + freezer) | 140 |
| Gastronorm pastry refrigerated cabinets | 141 |
| Refrigerated cabinet for fish | 142 |
| Refrigerated cabinet accessories | 143 |
| Options | 143 |

***** Refrigerated cabinets

Asber European-line cabinet range offers high quality and reliability to kitchen professionals in their daily tasks. Our equipment is specifically designed to provide a wide range to meet any professional needs, food safety compliance, energy savings and a steady, interruption-free operation.

Asber refrigerated cabinet range saves more energy compared to other standard commercial refrigeration appliances due to its 60mm thickness, CFC-free insulation that minimizes heat losses and reduces the compressor workload. Furthermore, our defrost system only activates according to presence of actual frost and operates for the time strictly needed to defrost, thereby reducing energy consumption. Asber cabinet range also ensures high storage capacity, adapting to any space requirements with many different options.

In short, Asber offers a whole set of solutions designed to provide a reliable and versatile product, which is environmentally friendly and great value for money.



The refrigerated cabinet range offers solutions for every individual need:



Mixed cabinets with separate refrigerator and



Pastry cabinets.



Display cabinets with glass doors.



Snack cabinets.



freezer compartment.

INSULATION

60 mm thickness, CFC-free, high-density (40 kg/m³) polyurethane insulation injected under high pressure that guarantees exceptional, long-term insulation and energy savings in every Asber cabinet model.



TEMPERATURE CONTROL

Digital thermostat enables to adjust temperature parameters quickly and easily. Elegant design with touch-sensitive buttons, it monitors the temperature inside the cabinet at all times Performs and controls automatic defrosting.



EVERYDAY CONVENIENCE

Gastronorm models have an interior rack, which allows placing and adjusting the shelves at the desired height, without using additional rails. Gastrononorm models use an easy-to-install guiding rail system which eliminates the risk of shelving tipping over when removed. They are suitable for food containers GN 2/1 or 2 x GN 1/1.



CONDENSING UNIT

Asber cabinets are equipped with powerful cooling units, which have sealed compressors using R-134 A and R-404 A refrigerating gases. All cooling units employed comply with the most stringent environmental European Union regulations.



DOORS

Asber cabinet doors have an automatic self-closing hinge system and open position fixing.



STRUCTURE

Reinforced structure inside the cabinet is reinforced, to be used in professional appplications with absolute confidence. Interiors with rounded edges, to make cleaning operations easier.



Adjustable separation between shelves. Shelves made of plastic-coated steel. All the doors with intergrated stainless steel handles.



STAINLESS STEEL LEGS

Easily adjustable in height (125 mm - 200 mm). With hidden screws to prevent dust and dirt build-up, thus ensuring maximum hygiene.

*** Snack cabinets |** Refrigerated cabinets








Stamped door.



Stainless steel guiding rails.



Door lock.




REFRIGERATED CABINETS

- Fully injection-moulded compact structure with stainless steel exterior panels and interior.
- Stainless steel doors with built-in handles, equipped with self-closing hinge system and open position fixing.
- Interiors with rounded edges, to make cleaning operations easier.
- Equipped with an inside light (option).
- Plasticized interior wire shelves, easily dismounted for cleaning.
- Rack system for placing and adjusting shelves.
- Height-adjustable stainless steel legs.
- Sealed condensing unit with ventilated condenser.
- Forced draft evaporator with anti-corrosion cover.
- Automatic evaporation of water from defrosting.
- Drain inside the chamber.
- CFC-Free R-134 ecological cooling, injection-moulded polyurethane insulation with a density of 40 Kg/m3.
- Luminous start-stop light.
 - Electronic temperature and defrost control with digital screen.
 - Working temperature of -2 °C to +8 °C at +32 °C room temperature.
 - Shelves provided: 3 shelves per cabinet.
 - Supply voltage: 230 V 1+N 50 Hz.

```
ECP-602 (L)
```

| Model | Reference | N° doors | Capacity (liters) | Power (W) | Compressor (W) | Dimensions (mm) |
|-----------|-----------|-------------|----------------------|--------------|-------------------|--------------------|
| ECP-601 L | 19023416 | 1 | 600 | 368 | 300 | 693 x 726 x 2067 |
| ECP-601 R | 19023417 | 1 | 600 | 368 | 300 | 693 x 726 x 2067 |
| ECP-602 L | 19023418 | 2 x 1/2 | 600 | 368 | 300 | 693 x 726 x 2067 |
| ECP-602 R | 19023419 | 2 x 1/2 | 600 | 368 | 300 | 693 x 726 x 2067 |







- Fully injection-moulded compact structure with stainless steel exterior panels and interior.
- Stainless steel doors with built-in handles, equipped with self-closing hinge system and open position fixing.
- Interiors with rounded edges, to make cleaning operations easier.
- Equipped with an inside light (option)
- Plasticized interior wire shelves, easily dismounted for cleaning
- Rack system for placing and adjusting shelves.
- Height-adjustable stainless steel legs.
- Sealed condensing unit with ventilated condenser.
- Forced draft evaporator with anti-corrosion cover.
- Automatic evaporation of water from defrosting.
- Drain inside the chamber.
- CFC-Free R-134 ecological cooling, injection-moulded polyurethane insulation with a density of 40 Kg/m3.
- Luminous start-stop light.
- Electronic temperature and defrost control with digital screen.
- Working temperature of -2 °C to +8 °C at +32 °C room temperature.
- Shelves provided: 3 shelves per cabinet.
- Supply voltage: 230 V 1+N 50 Hz.

ECP-1204

| Model | Reference | N° doors | Capacity (liters) | Power (W) | Compressor (W) | Dimensions (mm) |
|----------|-----------|-------------|----------------------|--------------|-------------------|--------------------|
| ECP-1202 | 19023570 | 2 | 1200 | 575 | 500 | 1388 x 726 x 2067 |
| ECP-1203 | 19023406 | 2 x 1/2 + 1 | 1200 | 575 | 500 | 1388 x 726 x 2067 |
| ECP-1204 | 19023407 | 4 x 1/2 | 1200 | 575 | 500 | 1388 x 726 x 2067 |

* Snack cabinets | Refrigerated display cabinets





ECP-601 GLASS (L)



ECP-1202 GLASS

REFRIGERATED DISPLAY CABINETS

- Fully injection-moulded compact structure with stainless steel exterior panels and interior.
- Double-layered glass doors with interior lighting (option) and built-in stainless steel handles.
- Doors equipped with self-closing hinge system and open position fixing.
- Interiors with rounded edges, to make cleaning operations easier.
- Plasticized wire interior shelves, easily dismounted for cleaning.
- Rack system for placing and adjusting shelves.
- Height-adjustable stainless steel legs.
- Sealed condensing unit with ventilated condenser.
- Forced draft evaporator with anti-corrosion cover.
- Automatic evaporation of water from defrosting.
- Drain inside the chamber.
- CFC-Free R-134 ecological cooling, injection-moulded polyurethane insulation with a density of 40 Kg/m3.
- Luminous start-stop light.
- Electronic temperature and defrost control with digital screen.
- Working temperature of -2 °C to +8 °C at +32 °C room temperature.
- Shelves provided: 3 shelves per cabinet.
- Supply voltage: 230 V 1+N 50 Hz.

| Model | Reference | N° doors | Capacity (liters) | Power (W) | Compressor (W) | Dimensions (mm) |
|-----------------|-----------|-------------|----------------------|--------------|-------------------|--------------------|
| ECP-601 GLASS L | 19023414 | 1 | 600 | 368 | 300 | 693 x 726 x 2067 |
| ECP-601 GLASS R | 19023415 | 1 | 600 | 368 | 300 | 693 x 726 x 2067 |
| ECP-1202 GLASS | 19023405 | 2 | 1200 | 575 | 500 | 1388 x 726 x 2067 |





19023392

4 x 1/2

1200

1012

1085

ECN-1204

1388 x 726 x 2067







Stamped door.



Door lock.



Forced draft evaporator.



MIXED CABINET (REFRIGERATOR + FREEZER)

- Fully injection-moulded compact structure with stainless steel exterior panels and interior.
- Stainless steel doors with built-in handles, equipped with self-closing hinge system and open position fixing. • Two independent sections - a refrigerator compartment and a freezer compartment - with separate
- compressors, evaporators and controllers.
- Interiors with rounded edges, to make cleaning operations easier.
- The door frames feature a built-in heating system to prevent the build-up of ice.
- Equipped with an inside light (option).
- Plasticized wire interior shelves, easily dismounted for cleaning.
- ECPN-1202/2
- Rack system for placing and adjusting shelves.
- Height-adjustable stainless steel legs.
- Sealed condensing unit with ventilated condenser. ٠
- Forced draft evaporator with anti-corrosion cover.
- Automatic evaporation of water from defrosting.
- Drain inside the chamber.
- CFC-Free R-134 ecological cooling, injection-moulded polyurethane insulation with a density of 40 Kg/m3.
- Luminous start-stop light.
- Electronic temperature and defrost control with digital screen.
- Shelves provided: 3 shelves per big doors.
- Operating temperature range:
- Refrigerator section -2 °C to 8 °C and freezer section -18 °C to -22 °C (at +32 °C room temperature).
- Supply voltage: 230 V 1+N 50 Hz.

| Model | Reference | N° doors | Capacity (liters) | Power (W) | Dimensions (mm) |
|-------------|-----------|-------------|----------------------|--------------|--------------------|
| ECPN-1202/2 | 19023439 | 2 | 2 × 600 | 1058 | 1388 x 726 x 2067 |

*** Gastronorm cabinets |** Refrigerated cabinets










ECP-1402



REFRIGERATED CABINETS

- Fully injection-moulded compact structure with stainless steel exterior panels and interior.
- Stainless steel doors with built-in handles, equipped with self-closing hinge system and
 - open position fixing.
- Interiors with rounded edges, to make cleaning operations easier.
- Equipped with an inside light (option).
- Plasticized interior wire shelves, easily dismounted for cleaning
- Height-adjustable stainless steel legs.
- Sealed condensing unit with ventilated condenser.
- Forced draft evaporator with anti-corrosion cover.
- Automatic evaporation of water from defrosting.
- Drain inside the chamber.
- CFC-Free R-134 ecological cooling, injection-moulded polyurethane insulation with a density of 40 Kg/m3.
- Luminous start-stop light.
- Electronic temperature and defrost control with digital screen.
- Suitable for food containers GN 2/1 or 2 x GN 1/1; equipped with compatible sliding guides.
 Provided with 3 grid shelves GN 2/1 per each large door compartment or 1 grid shelf GN 2/1 per each small door compartment.
- Working temperature of -2 °C to +8 °C at +32 °C room temperature.
- Supply voltage: 230 V 1+N 50 Hz.

| Model | Reference | N° doors | Capacity (liters) | Power (W) | Compressor (W) | Dimensions (mm) |
|----------|-----------|-------------|----------------------|--------------|-------------------|--------------------|
| ECP-1402 | 19023408 | 2 | 1400 | 704 | 500 | 1388 x 826 x 2008 |
| ECP-1403 | 19023411 | 1+ 2 x 1/2 | 1400 | 704 | 500 | 1388 x 826 x 2008 |
| ECP-1404 | 19023413 | 4 x 1/2 | 1400 | 704 | 500 | 1388 x 826 x 2008 |





ECP-701 GLASS (L)

REFRIGERATED DISPLAY CABINETS

- Fully injection-moulded compact structure with stainless steel exterior panels and interior.
- Double-layered glass doors with interior lighting (option) and built-in stainless steel handles.
- Doors equipped with self-closing hinge system and open position fixing.
- Interiors with rounded edges, to make cleaning operations easier.
- Internal shelves 2/1 GN of plastic-coated steel, adjustable in height.
- Height-adjustable stainless steel legs.
- Sealed condensing unit with ventilated condenser.
- Forced draft evaporator with anti-corrosion cover.
- Automatic evaporation of water from defrosting.
- Drain inside the chamber.
- CFC-Free R-134 ecological cooling, injection-moulded polyurethane insulation with a density of 40 Kg/m3.
- Luminous start-stop light.
- Electronic temperature and defrost control with digital screen.
- Working temperature of -2 °C to +8 °C at +32 °C room temperature.
- Suitable for food containers GN 2/1 or 2 x GN 1/1; equipped with compatible sliding guides.
- Provided with 3 grid shelves GN 2/1 per each large door compartment.
- Supply voltage: 230 V 1+N 50 Hz.

ECP-1402 GLASS

| Мо | del | Reference | N° doors | Capacity (liters) | Power (W) | Compressor (W) | Dimensions (mm) |
|----------|---------|-----------|-------------|----------------------|--------------|-------------------|--------------------|
| ECP-701 | GLASS L | 19023420 | 1 | 700 | 368 | 300 | 693 x 826 x 2008 |
| ECP-701 | GLASS R | 19023421 | 1 | 700 | 368 | 300 | 693 x 826 x 2008 |
| ECP-1402 | GLASS | 19023409 | 2 | 1400 | 575 | 500 | 1388 x 826 x 2008 |





19023395

4 x 1/2

1400

1012

1000

ECN-1404

1388 x 826 x 2008



- CFC-Free R-134 ecological cooling, injection-moulded polyurethane insulation with a density of 40 Kg/m3.
- Luminous start-stop light.
- Electronic temperature and defrost control with digital screen.
- Working temperature of -2 °C to +8 °C at +32 °C room temperature.
- Suitable for food containers GN 2/1 or 2 x GN 1/1; equipped with compatible sliding guides.
- Provided with 3 grid shelves GN 2/1 per each large door compartment
- Supply voltage: 230 V 1+N 50 Hz.

| Model | Reference | N° doors | Capacity (liters) | Power (W) | Compressor (W) | Dimensions (mm) |
|-------------|-----------|-------------|----------------------|--------------|-------------------|--------------------|
| ECP-702/2 L | 19023426 | 2 x 1/2 | 2 x 350 | 968 | 2 x 178 | 693 x 826 x 2008 |
| ECP-702/2 R | 19023427 | 2 x 1/2 | 2 x 350 | 968 | 2 x 178 | 693 x 826 x 2008 |
| ECP-1402/2 | 19023410 | 2 | 2 x 700 | 968 | 2 × 300 | 1388 x 826 x 2008 |
| ECP-1403/2 | 19023412 | 1 + 2 x 1/2 | 2 x 700 | 968 | 2 × 300 | 1388 x 826 x 2008 |







- Electrical power: 575 W.
- Refrigeration power: 348 W.

| Model | Reference | N° doors | Capacity (liters) | Power (W) | Dimensions (mm) |
|------------|-----------|-------------|----------------------|--------------|--------------------|
| ECPM-702 L | 19023437 | 2 x 1/2 | 700 | 851 | 693 x 826 x 2008 |
| ECPM-702 R | 19023438 | 2 x 1/2 | 700 | 851 | 693 x 826 x 2008 |
| ECPM-1403 | 19023433 | 1 + 2 x 1/2 | 1400 | 1150 | 1388 x 826 x 2008 |
| ECPM-1404 | 19023434 | 4 x 1/2 | 1400 | 1150 | 1388 x 826 x 2008 |





Stamped door.



Stainless steel guiding rails.

MIXED CABINET (REFRIGERATOR + FREEZER)

- Fully injection-moulded compact structure with stainless steel exterior panels and interior.
- Stainless steel doors with built-in handles, equipped with self-closing hinge system and open position fixing.
 - Two independent sections a refrigerator compartment and a freezer compartment with separate compressors, evaporators and controllers.
 - Interiors with rounded edges, to make cleaning operations easier.
 - Equipped with an inside light (option).
 - Plasticized wire interior shelves, easily dismounted for cleaning.
 - Height-adjustable stainless steel legs.
 - Sealed condensing unit with ventilated condenser.
 - Forced draft evaporator with anti-corrosion cover.
 - Automatic evaporation of water from defrosting.
 - Drain inside the chamber.
 - CFC-Free R-134 ecological cooling, injection-moulded polyurethane insulation with a density of 40 Kg/m3.
 - Luminous start-stop light.
 - Electronic temperature and defrost control with digital screen.
 - Shelves provided: 3 shelves per big doors.
 - Suitable for food containers GN 2/1 or 2 x GN 1/1, equipped with compatible sliding guides.
 - Operating temperature range: refrigerator section -2 °C to 8 °C and freezer section -18 °C to -22 °C (at +32 °C room temperature).
 - Supply voltage: 230 V 1+N 50 Hz.

| Model | Reference | N° doors | Capacity (liters) | Power (W) | Dimensions (mm) |
|-------------|-----------|-------------|----------------------|--------------|--------------------|
| ECPN-1402/2 | 19023440 | 2 | 1400 | 1364 | 1388 x 826 x 2008 |

ECPN-1402/2





ECPB-701 (L/R) Pastry Cabinet

ECPB-701 (L/R)

ECPB-1402

PASTRY REFRIGERATED CABINET


- Fully injection-moulded compact structure with stainless steel exterior panels and interior.
- Stainless steel doors with built-in handles, equipped with self-closing hinge system and open position fixing.
- Interiors with rounded edges, to make cleaning operations easier.
- Equipped with an inside light (option).
- Plasticized interior wire shelves, easily dismounted for cleaning
 - Height-adjustable stainless steel legs.
- Sealed condensing unit with ventilated condenser.
- Forced draft evaporator with anti-corrosion cover.
- Automatic evaporation of water from defrosting.
- Drain inside the chamber.
- CFC-Free R-134 ecological cooling, injection-moulded polyurethane insulation with a density of 40 Kg/m3.
- Luminous start-stop light.
- Electronic temperature and defrost control with digital screen.
- Equipment: 3 shelves 600x400 mm of plastic-coated steel and support guides.
- Working temperature of -2 °C to +8 °C at +32 °C room temperature.
- Capacity 17 trays 600x400 mm (not included).
- Supply voltage: 230 V 1+N 50 Hz.

MIXED CABINET (REFRIGERATION + PASTRY)

- Fully injection-moulded compact structure with stainless steel exterior panels and interior.
- Stainless steel doors with built-in handles, equipped with self-closing hinge system and open position fixing.
- Interiors with rounded edges, to make cleaning operations easier.
- Equipped with an inside light (option)
- Plasticized interior wire shelves, easily dismounted for cleaning
- Height-adjustable stainless steel legs.
- Sealed condensing unit with ventilated condenser.
- Forced draft evaporator with anti-corrosion cover.
- Automatic evaporation of water from defrosting.
- Drain inside the chamber.
- CFC-Free R-134 ecological cooling, injection-moulded polyurethane insulation with a density of 40 Kg/m3.
- Luminous start-stop light.Electronic temperature and defrost control with digital screen.
- Capacity:
- 1 module for 17 trays 600x400 mm (not included).
 1 module for 2/1-GN shelves.
- Equipment: 3 shelves 2/1-GN and 3 shelves 600x400 mm.
- Working temperature of -2 °C to +8 °C at +32 °C room
- temperature.
- Supply voltage: 230 V 1+N 50 Hz.

| Model | Reference | N° doors | Туре | Capacity (liters) | Power (W) | Dimensions (mm) |
|------------|-----------|-------------|-------------|----------------------|--------------|--------------------|
| ECPB-701 L | 19023587 | 1 | Pastry | 600 | 644 | 760 x 729 x 2005 |
| ECPB-701 R | 19023588 | 1 | Pastry | 600 | 644 | 760 x 729 x 2005 |
| ECPB-1402 | 19023586 | 2 | GN + Pastry | 1400 | 694 | 1388 x 826 x 2008 |





Interior air-flow circulation.



REFRIGERATED FISH CABINET

- Fist cabinet is specially designed to provide high humidity and constant temperature throughout all the drawers.
- Excellent air-flow circulation system, which guarantees uniform air distribution, ensuring a constant and homogeneus temperature in the body cabinet.
- Fully injected compact structure with stainless steel exterior panels.
- ECF-601
- Stainless steel cabinet interior.
- Doors with built-in stainless steel handles.
- Interiors with rounded edges, to make cleaning operations easier.
- Doors equipped with automatic return hinge system and open position fixing.
- Equipped with a drain which is connected to the network.
- Stainless steel supports, easily dismounted for cleaning.
- Rack system for placing and adjusting of shelves.
- Height-adjustable stainless steel legs.
- Sealed condensing unit with ventilated condenser.

- CFC-Free R-134 ecological cooling.
- Forced draft evaporator with anti-corrosion cover.
- Automatic evaporation of water from defrosting.
- CFC-free, injection-moulded polyurethane insulation with a density of 40 Kg/m3.
- Electronic temperature and defrost control with digital screen.
 - Supply voltage: 230 V 1+N 50 Hz.
 - Equipped with 7 internal high capacity drawers for fish, made of sanitary PVC with a dual stainless steel perforated base.
 - Individual drainage of each drawer to the general drainage system, removable for general cleaning of the cabinet.
- Working temperature: -4 °C to +2 °C at +38 °C room temperature.

| Model | Reference | N° doors | Capacity (liters) | Power (W) | Dimensions (mm) |
|-----------|-----------|-------------|----------------------|--------------|--------------------|
| ECF-601 L | 19023388 | 1 | 600 | 644 | 760 x 729 x 2005 |
| ECF-601 R | 19023389 | 1 | 600 | 644 | 760 x 729 x 2005 |



SHELVES FOR CABINETS

• Easily removable plasticized wire shelves.

| Model | Reference | Dimensions (mm) | Series | For models | Description | |
|---------|-----------|--------------------|---------------------|--|--|--|
| SHC600B | 19023442 | 560 x 542 | Snack series | ECP, ECN, ECPM, ECPN (600 and 1200 series) | Rack | |
| SHC600S | 19023444 | 500 x 158 | Snack series | ECP, ECN, ECPM, ECPN (600 and 1200 series) | Narrow shelf used to fill the gap between the two large shelves in double SNACK cabinets | |
| SHC700 | 19023443 | 650 x 530 | Gastronorm cabinets | ECP, ECN, ECPM, ECPN, ECPB (700 and 1400 series) | GN 2/1 Rack | |





GUIDES FOR CABINETS

- Stainless steel guides.
- Equipped with tabs to facilitate extraction.
- U shaped to support shelves.
- Placing of Gastronorm shelves.

SGC700

| Model | Reference | Dimensions (mm) | Series | For models | Description |
|--------|-----------|--------------------|-----------------------|--|-----------------------------|
| SGC700 | 19023441 | 662 | Set of sliding guides | ECP, ECN, ECPM, ECPN, ECPN, ECPB (700 and 1400 series) | U shaped to support shelves |



TRAYS

- Drawers for fish cabinets made of sanitary PVC.
- The trays for compartments have a perforated base.

ACPP600

| Model | Reference | Dimensions (mm) | Series | For models |
|---------|-----------|--------------------|--------------|------------|
| ACPP600 | 19014780 | 600 x 400 x 120 | Fish cabinet | ECF-601 |

Refrigerated cabinet options

| Models | Options | Description |
|---------|----------------------------|---------------------|
| RI-C-1D | Stainless Steel Back Panel | For 1 door |
| RI-C-2D | Stainless Steel Back Panel | For 2 doors |
| R-4 | Wheel kit | 4 pack 2 with brake |
| CR-DOOR | Lock Door | For each |
| MHS-1D | Meat Hanging System | For 1 door |
| MHS-2D | Meat Hanging System | For 2 doors |